

MAINTENANCE AND OPERATION  
INSTRUCTION MANUAL

# DB4402

High-Performance Dual  
FM Monitoring Receiver & Radio Streamer



# Contents

<b>Introduction</b> .....	<b>5</b>
<b>Typographic conventions</b> .....	<b>6</b>
<b>General Information</b> .....	<b>7</b>
<b>Product Features</b> .....	<b>8</b>
<i>Technical Specifications</i> .....	9
<b>Factory Default Settings</b> .....	<b>11</b>
<i>Monitoring Receiver</i> .....	11
<i>Network Settings</i> .....	11
<i>WEB Server</i> .....	11
<i>E-mail</i> .....	11
<i>Audio</i> .....	11
<i>GSM MODEM</i> .....	11
<i>SNMP Settings</i> .....	12
<i>Management Settings</i> .....	12
<i>Channel Presets Default Settings</i> .....	13
<i>Audio Streamer</i> .....	14
<i>Network Settings</i> .....	14
<i>WEB Server</i> .....	14
<i>Audio</i> .....	14
<i>GSM MODEM</i> .....	14
<i>SNMP Settings</i> .....	14
<i>Management Settings</i> .....	15
<b>Safety Precautions</b> .....	<b>16</b>
<b>Panel Indicators and Appointments</b> .....	<b>17</b>
<i>Front View</i> .....	17
<i>Rear View</i> .....	18
<b>Getting Started</b> .....	<b>19</b>
<i>Connection</i> .....	19
<i>Network Settings</i> .....	20
<i>Login</i> .....	21
<b>WEB Interface FM Monitoring Receiver</b> .....	<b>22</b>
<i>Device Control Interface</i> .....	22
<i>Main Screen</i> .....	23
<i>RDS/RBDS Screen</i> .....	24
<i>ODA Screen</i> .....	25
<i>FM Graph Screen</i> .....	26
<i>MPX Screen</i> .....	27
<i>Spectrum Analyzer Screen</i> .....	28
<i>Scope Screen</i> .....	29
<i>Bandscan Screen</i> .....	30
<i>Status Screen</i> .....	31
<i>LOG Screen</i> .....	32
<i>Settings Screen</i> .....	33
<i>Main Settings Screen</i> .....	33
<i>Channel Settings Screen</i> .....	35

<i>Alarm / Warning Triggers Defined</i> .....	37
<i>Alarm Notifications</i> .....	39
<i>Management Screen</i> .....	40
<b>WEB Interface FM Radio Streamer</b> .....	<b>42</b>
<i>Device Control Interface</i> .....	42
<i>Main Screen</i> .....	43
<i>RDS/RBDS Screen</i> .....	44
<i>ODA Screen</i> .....	45
<i>Bandscan Screen</i> .....	46
<i>Status Screen</i> .....	47
<i>LOG Screen</i> .....	48
<i>Settings Screen</i> .....	49
<i>Main Settings Screen</i> .....	49
<i>Presets</i> .....	51
<i>Management Screen</i> .....	52
<b>External GSM Modem Settings</b> .....	<b>54</b>
<b>Network Discovery</b> .....	<b>56</b>
<b>WARRANTY TERMS AND CONDITIONS</b> .....	<b>57</b>
<b>Product Registration Card</b> .....	<b>58</b>

THIS PAGE  
IS INTENTIONALLY  
LEFT BLANK

## Introduction

DEVA Broadcast Ltd. is an international communications and high-technology manufacturing organization, its corporate headquarters and facility located in Burgas, Bulgaria. The company serves the broadcast and corporate markets worldwide – from consumers and small businesses to the largest global organizations. It is dedicated to the research, design, development and provision of advanced products, systems and services. DEVA launched its own brand back in 1997 and has nowadays evolved to become known as a market leader and internationally reputed manufacturer of user-friendly, cost-effective and innovative broadcast products.

Creativity and innovation are deeply woven into DEVA corporate culture. Through successful engineering, marketing and management our team of dedicated professionals creates future-oriented solutions to improve customers' performance. You may rely that all issues communicated to our crew would be addressed accordingly. We pride ourselves on our pre and post-sales support and purchase services, which along with the outstanding quality of our radio gear have won us due respect and the market authority position.

DEVA best-of-breed solutions have become the best sellers for our partners. The strategic partnerships which have been formed with industry leaders during all these years that we have been operating on the broadcasting market, have proved us a reliable business partner and a valuable asset, as our dealers worldwide would confirm. In constant pursuit of precision and long-term satisfaction, DEVA enhances the reputation of our partners and clients alike. Furthermore, we have already a proven merit as a credible partner provider.

Our portfolio offers complete line of high quality and competitive products for FM and Digital Radio, Radio Networks, Telecommunication Operators and regulation authorities. For almost two decades of intensive software and hardware development, we have achieved a unique price-performance and endurance of our product lines. Our company's multitude of equipment and services is in line with the latest technologies and key trends. The most recognizable characteristics attributed to DEVA products are their clear-cut, streamlined design, easiness of use and cost-effectiveness: simplicity of forms but multiplicity of functions.

For us there is no stage when we deem that we have reached the most satisfactory level in our work. Our engineers are in constant pursuit of new ideas and technologies to be captured in DEVA solutions. Simultaneously, a strict control is being exercised at each step of any new development. Experience and hard work are our fundament but the continuous improving process is what we never leave aside. DEVA participates on a regular basis in all landmark broadcasting events, not only to promote its products, but to exchange valuable know-how and experience. We are also engaged in international large-scale projects involving radio and audio solutions which makes us even more competitive on the global market.

All DEVA products are developed and produced in accordance with the latest ISO 9001 quality control standards.

## Typographic conventions

This manual uses the following typographic conventions:

Style	Used for
<b>NOTE</b>	Important notes and recommendations
Example	Used when example text is cited
<a href="#">“Menu” on page XX.</a>	References
[OK]	Interface Interactive buttons.
<i>Settings</i>	Menu paths are represented as follows: <i>Settings</i> > <i>General</i> > <i>Backup</i>

## General Information

The DB4402 – Dual FM Monitoring Receiver is a superb and highly practical combination between a logger and a streamer which allows you to easily and accurately monitor and store all important parameters of the FM signal while simultaneously giving you the opportunity to listen to a constant, uninterrupted audio stream. The synchronized performance of both major functions is at the core of the idea for this model, as well as the unit's major asset. You can listen to the selected audio feed at the same time as the logger campaign is running. The design of this device relies on simplicity coupled with functionality to offer customers the opportunity of a single solution to both tasks.

Providing the stable, dependable operation characterizing all DEVA products, the DB4402 is fully DSP-based, with a built-in oscilloscope and an RDS/RBDS decoder with a BER meter. It also permits users to set alarms for RF, MPX, Pilot and RDS signal via email, SMS or SNMP. What is more, the TCP/IP and GSM connectivity provides easy remote control, monitoring and listening to the radio signal from any location.

The device offers a “Restore Factory Defaults” option and easy update of the firmware. It is an advanced solution giving customers a number of advantages and top all-round, multi-faceted performance as both a monitoring tool and a streaming device.

## Product Features

- Fully DSP based core
- Built-in Oscilloscope allowing Left, Right and MPX display
- MPX Power measurement with data history
- RF Spectrum analyzer allowing to check the RF Carrier parameters
- MPX Spectrum analyzer for Left, Right and MPX measurements
- Selectable De-emphasis – 50µs and 75µs
- Built-in Stereo Decoder; Stereo Presence Detection
- Date & Time Settings with various formats
- LAN port for full TCP/IP remote control and monitoring
- Up to 90dBµV direct RF Antenna Input
- Adjustable alarms for RF, Deviation, Pilot and RDS signal
- Firmware update for future-proof operation
- Parameters Factory Restore Option
- FM Band 87 - 108 MHz Basic Spectrum Analyzer
- MPX, PILOT & RDS deviation meters
- LEFT and RIGHT demodulated audio level meters
- Headphones audio output
- RDS and RBDS decoder with BER meter
- Intuitive Application Interface
- Alarm dispatch via E-mail, SMS, SNMP
- Channel status reporting via SMS
- RF and RDS Measurements
- Remote Listening via optional GSM modem
- Real Time Audio Program Streaming
- Attractive price and very good price-performance ratio
- Very Intuitive Embedded WEB server for interactive supervision
- Proved and reliable hardware for 24/7/365 operating
- Easy Installation and Setup
- SNTP for automatic synchronization of the built-in clock
- Compact and Robust Aluminum Case for high RF immunity

## TECHNICAL SPECIFICATIONS

<b>RF INPUT</b>	
Frequency Range	87.0 to 108 MHz, Frequency Agile
Step Increment	50 kHz
Antenna Input	50 $\Omega$ , BNC Connector, 10 dB $\mu$ V sensitivity
Internal Attenuator	0, 10, 20 and 30dB, auto
Dynamic Range	0 dB $\mu$ V to 100 dB $\mu$ V
S/N	57dB, RF > 60dB $\mu$ V, 30dB, RF > 10dB $\mu$ V
<b>METERING RESOLUTION &amp; ACCURACY</b>	
RF Level	0 to 95 dB $\mu$ V; resolution - 0.1 dB $\mu$ V; accuracy - $\pm$ 1 dB (10 to 85 dB $\mu$ V)
Multipath	0 to 100%; accuracy - $\pm$ 1%
MPX Deviation	$\pm$ 120 kHz; resolution - 0.1kHz; accuracy - $\pm$ 10%, $\pm$ 5% typically
MPX Power	$\pm$ 12 dBr; resolution - 0.1dBr, 10 sec. integration; accuracy - $\pm$ 0.2 dBr
Audio Level	-50 to +5dB; resolution - 0.1dB; accuracy - $\pm$ 5%
Pilot Level	0 to 12 kHz; resolution - 0.1 kHz; accuracy - $\pm$ 0.5 kHz, 1 to 12 kHz
RDS Level	0 to 9 kHz; resolution - 0.1 kHz; accuracy - $\pm$ 10% typical and not guaranteed
<b>AUDIO, MPX, PILOT, RDS LEVELS</b>	
Validity	RF level preferably > 50dB $\mu$ V
Multiplex Level	Peak level, 256 ksamples over 1 sec.
Audio Level	Peak level, 64 ksamples over 1 sec.
Pilot Level	Mean peak level, 256 ksamples over 1 sec.
RDS Level	Mean peak level, 256 ksamples over 1 sec.
<b>STEREO DECODER</b>	
Stereo Separation	>25dB, typical >30dB
De-emphasis	50 or 75 $\mu$ s, Selectable
THD	0.5%
<b>OUTPUTS</b>	
Audio stream	Icecast/Shoutcast compatible audio stream
Alarms	E-mail, SMS, SNMP
Headphone	1/8" (3.5mm) Phone Jack
GSM Modem	15-pin Male D-Sub Connector

<b>RDS DATA DECODING</b>	
Standards	European RDS CENELEC; United States RBDS NRSC
Error Correction & Counting	Yes
AF Decoding	Yes
CT (Time/Date)	Yes
PI, PTY, DI, MS	Yes
TA/TP	Yes
RT (Radio Text)	Yes
PS (Program Service name)	Yes
<b>FFT SPECTRUM ANALYSIS</b>	
Input	Composite MPX, Audio
Dynamic Range	80 dB
FFT Length	1024
Sampling Rate	256 kHz - Composite, 64 kHz - Audio
<b>SCOPE ANALYSIS</b>	
Input	Composite MPX, Audio
Trigger Mode	Auto, Fall
Dynamic Range	±120 kHz
Sampling Rate	256 kHz - Composite, 64 kHz - Audio
<b>USER INTERFACE</b>	
Web interface	Full monitoring and control; Interactive and easy to use
Indicators	6 LEDs (on front panel)
Headphone Output	1/8" (3.5mm) phone jack (on front panel)
<b>TCP/IP COMMUNICATION</b>	
Type	Ethernet 10/100M Base-T Port
Connector	RJ45 (on rear panel)
<b>OPERATING CONDITIONS</b>	
Temperature	10° to 60°C
EMC Immunity	6V/m
<b>POWER SUPPLY</b>	
Voltage	100-240V / 50-60 Hz / 25W
Connector	IEC320
<b>SIZE AND WEIGHT</b>	
Dimensions (W;H;D)	485 x 44 x 300 mm
Shipping Weight	540 x 115 x 300 mm / 4.5kg

## Factory Default Settings

### MONITORING RECEIVER

---

#### Network Settings

IP	192.168.1.2
Gateway	192.168.1.1
Subnet Mask	255.255.255.0
DNS	192.168.1.1
DHCP	Disabled

#### WEB Server

HTTP Port	80	
Admin	Username	user
	Password	pass
User	Username	user
	Password	pass

#### E-mail

E-mail 1	<i>blank</i>
E-mail 2	<i>blank</i>
Sender	<i>blank</i>
Server	<i>blank</i>
Port	25

#### Audio

Stream Port	5000
Name	DB4402 - FM Radio Monitoring Tool
Quality	128 kbps

#### GSM MODEM

Number 1	<i>blank</i>
Number 2	<i>blank</i>
Number 3	<i>blank</i>
Number 4	<i>blank</i>
Baudrate	9600

**SNMP Settings**

Agent	Enabled
Agent ID	1
Agent Port	161
Read Community	DEVA44
Write Community	DEVA44
Manager IP	192.168.1.1
Manager Port	162

**Management Settings**

Attenuator	Auto
De-emphasis	50 $\mu$ s
Internet Time	Enabled
Internet Time Server	pool.ntp.org
Internet Time Server Port	123
Time Zone	UTC (+00:00)
Web session timeout	3 minutes
SNMP session timeout	1 minute
Watchdog	Disabled
Target Address	192.168.1.1
Ping Interval	300 seconds
Startup Delay	300 seconds
Max Retries	9

### Channel Presets Default Settings

Parameter	CH 1	CH 2	CH 3	CH 4	CH 5	CH 6
Scheduling	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled
Frequency	98 kHz					
Alarms Control	All Disabled					
Trigger Time	5 minutes					
Release Time	5 minutes					
RF Alarm Low Threshold	40 dB $\mu$ V					
RF Alarm High Threshold	60 dB $\mu$ V					
MPX Alarm Low Threshold	50 kHz					
MPX Alarm High Threshold	90 kHz					
MPX Power Alarm Low Threshold	-8 dBr					
MPX Power Alarm High Threshold	6 dBr					
Left Alarm Low Threshold	-30 dB					
Left Alarm High Threshold	3 dB					
Right Alarm Low Threshold	-30 dB					
Right Alarm High Threshold	3 dB					
Pilot Alarm Low Threshold	5 kHz					
Pilot Alarm High Threshold	9 kHz					
RDS Alarm Low Threshold	2 kHz					
RDS Alarm High Threshold	7 kHz					
RDS Group Alarm	All Disabled					

## AUDIO STREAMER

### Network Settings

IP	192.168.1.3
Gateway	192.168.1.1
Subnet Mask	255.255.255.0
DNS	192.168.1.1
DHCP	Disabled

### WEB Server

HTTP Port	80	
Admin	Username	user
	Password	pass
User	Username	user
	Password	pass

### Audio

Stream Port	5000
Name	DB4402 - FM Radio Streamer
Quality	128 kbps

### GSM MODEM

Number 1	<i>blank</i>
Number 2	<i>blank</i>
Number 3	<i>blank</i>
Number 4	<i>blank</i>
Baudrate	9600

### SNMP Settings

Agent	Enabled
Agent ID	1
Agent Port	161
Read Community	DEVA44
Write Community	DEVA44
Manager IP	192.168.1.1
Manager Port	162

### Management Settings

Attenuator	Auto
De-emphasis	50 $\mu$ s
Internet Time	Enabled
Internet Time Server	pool.ntp.org
Internet Time Server Port	123
Time Zone	UTC (+00:00)
Web session timeout	3 minutes
SNMP session timeout	1 minute
Watchdog	Disabled
Target Address	192.168.1.1
Ping Interval	300 seconds
Startup Delay	300 seconds
Max Retries	9

## Safety Precautions

**IMPORTANT:** *Carefully read this paragraph as it contains important instructions concerning operator safety and directions regarding the installation, operation and maintenance of the equipment. Failure to observe the safety instructions and information given in this manual constitutes an infringement of the safety rules and design specifications provided for this piece of equipment. DEVA Broadcast Ltd. declines all responsibility if any one of the safety rules given herein is not observed. DEVA Broadcast Ltd. declines all responsibility if the end-user resells the product. The equipment is to be used by people capable of operating it in a trouble-free manner and it is assumed that they are aware of the following safety rules.*

- ◇ Keep this manual with the utmost care and close at hand so that it can be consulted whenever needed
- ◇ After unpacking the equipment, check its condition.
- ◇ Avoid banging the equipment.
- ◇ The packing material (plastic bags, polystyrene, nails, etc.) must never be left within reach of children, as these items are potential sources of danger.
- ◇ Do not use the equipment in places where the temperature is not within the recommended range, as specified by the manufacturer.
- ◇ Before connecting the equipment, make sure the nameplate specifications correspond to the mains electricity supply (the nameplate is located on the equipment enclosure).
- ◇ Do not remove the sticker from the equipment as it contains important specifications and the relevant serial number.
- ◇ To join the equipment to the mains supply, use the power cord purchased with the equipment.
- ◇ The equipment must be used only for the purposes it was designed for.
- ◇ Abuse or misuse of the equipment is extremely dangerous for people, pets and property. The manufacturer declines all responsibility for damage and injury resulting from improper use and mishandling.
- ◇ Certain basic safety rules must be observed when using electrical equipment, in particular:
  - Never touch the equipment with wet and/or damp hands or other parts of the body.
  - Keep the equipment away from drops of water or sprinkling systems.
  - Never use the equipment near high heat sources or explosive material.
  - Do not introduce any extraneous matter into the equipment.
  - Do not allow children or untrained people to use the equipment.
- ◇ Before cleaning or servicing the equipment outside, disconnect its power supply and wait at least 2 seconds before working on it, as recommended by current safety regulations.
- ◇ In the event of faults and/or improper operation, turn off the equipment, shut off the electrical power and call your dealer.
- ◇ Do not attempt to make repairs and/or adjustments when covers/guards or circuit boards are to be removed.
- ◇ Call your dealer for any repairs and be certain original spare parts are used. Failure to observe this rule may adversely affect the safety level of your equipment.
- ◇ The equipment is to be connected to the mains supply and provided with adequate and efficient earth conductors.
- ◇ When installing, leave a clearance of at least 1 cm around the equipment to allow air to pass freely.


## Panel Indicators and Appointments

### FRONT VIEW



1. Phones Output – Audio signal from the tuned frequency.
2. Power LED Indicator
3. Status
4. RX1 LAN LED Indicator. This LED can be in one of the following states:
  - Off – No User Connected, Logger is active;
  - Blinking – User is connected, Logger is inactive.
5. RX1 GSM LED Indicator. This LED can in one of the following states:
  - Off – no GSM Modem;
  - Fast Blinking – GSM Modem initialization;
  - Slow Blinking – GSM Modem present and operating.
6. RX2 LAN LED Indicator. This LED can be in one of the following states:
  - Off – No User Connected, Logger is active;
  - Blinking – User is connected, Logger is inactive.
7. RX2 GSM LED Indicator. This LED can in one of the following states:
  - Off – no GSM Modem;
  - Fast Blinking – GSM Modem initialization;
  - Slow Blinking – GSM Modem present and operating.

## REAR VIEW

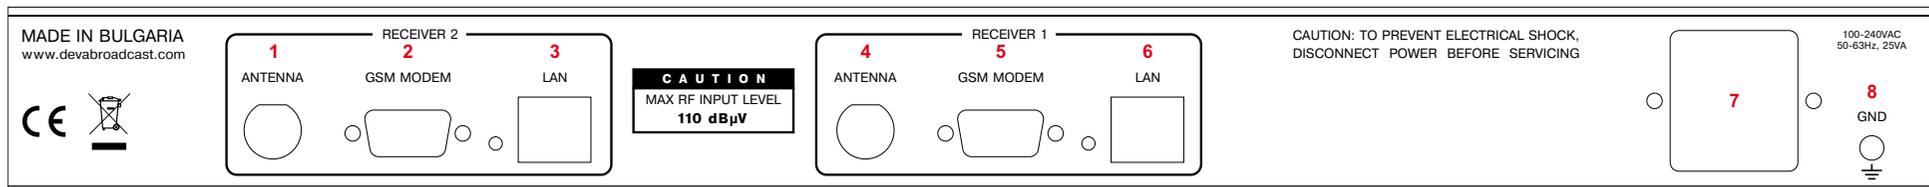

### *Receiver 2*

1. LAN Port / Internet Input – standard RJ-45 port;
2. GSM Modem Connector - DB-15 male;
3. Antenna Input - BNC connector for FM Antenna;

### *Receiver 1*

4. LAN Port / Internet Input – standard RJ-45 port;
5. GSM Modem Connector - DB-15 male;
6. Antenna Input - BNC connector for FM Antenna;

7. Power Supply;
8. GND

## Getting Started

For the normal operation of DB4402, you will need the following conditions:

- Standard Ethernet 10/100M connection;
- Correct assigned Network configuration and device settings;

To provide all these conditions please, follow the instructions below.

### CONNECTION

---

1. Install the unit on its operation place;
2. Before connecting the AC Power, make sure that the fuse rating is in accordance with the mains supply at your location. DB4402 Power Supply Factory Settings are: 100-240 VAC; 1AFuse.;
3. Connect the antenna cable to the RF antenna input connectors located on the rear panel of the device - sections RX1 and RX2;
4. Connect the DB4402 to the TCP/IP network using two direct network cables - sections RX1 and RX2;
5. Connect the optional GSM modems via the supplied connection cable/s.

**NOTE:** Please, locate and select a proper place for the GSM antenna for achieving better GSM network coverage.

**NOTE:** The GSM antenna must be far enough from the monitoring devices. The GSM modem radiate RF signal that may cause spurious emissions that will make troubles with the accuracy of the measurements.

## NETWORK SETTINGS

---

After connecting the network cable the Led 'LAN' located on the rear panel must be ON or flashing. The next and most important step for configuration is the adjustment procedure of the Network Communication. The settings shown below are Default Network Settings:

Monitoring Receiver IP	192.168.1.2
Audio Streamer IP	192.168.1.3
Mask	255.255.255.0
Gateway	192.168.1.1
DNS	192.168.1.1
DHCP	Disabled
HTTP Port	80
Stream Port	5000
SNMP Agent Port	161
SNMP Manager IP	192.168.1.1
SNMP Manager Port	162

DB4402 is controlled through the built-in web server and a standard web browser can be used to monitor its status or make some adjustments. To connect to the device you need to know its IP address and follow the next steps:

- Open a WEB Browser.
- Enter the device IP address in the browser's address field.

**NOTE:** If the port is different than the default one (80), it is necessary to specify it, e.g. `http://192.168.1.2:9000`

- Press <ENTER>.

If you do not know the IP address you can access DB4402 by using UPnP discovery in local networks ([see "UPnP and DB4402 discovery in Local Networks" on page 56](#)).


**ATTENTION:** Depending on Internet Protocol Settings, assigned IP address may not be visible outside your local network, thus device may be accessed only within that network. Consult with your network administrator for the appropriate IP settings.

## LOGIN

---

**ATTENTION:** Upon Login on the FM Monitoring receiver, the Logger will stop and will start again automatically after Logout.

The DB4402 can serve two users at a time, one logged in the FM Monitoring receiver, and one logged in the FM Radio Streamer. Username and Password will be requested when connecting. Default values are *user* and *pass*.

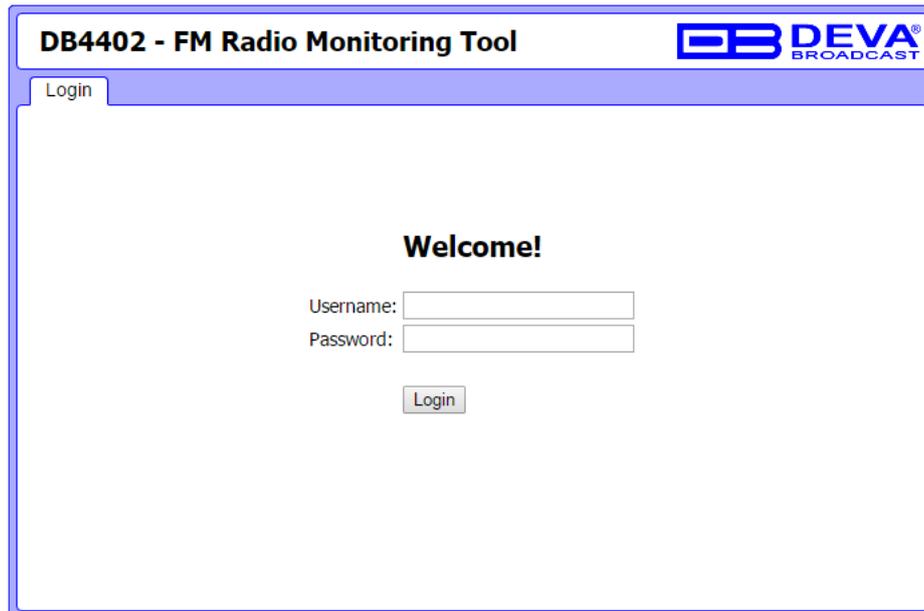

DB4402 - FM Radio Monitoring Tool

DEVA BROADCAST

Login

**Welcome!**

Username:

Password:

Login

Enter your credentials and press Login button to continue to Main screen.

If the WEB Interface is already in use you will be prompted shortly:



DB4402 - FM Radio Monitoring Tool

DEVA BROADCAST

Login

**The device is in use.**

Please go [here](#) and try login again later.

**NOTE:** DB4402 will Logout automatically the current session after the defined WEB session timeout. (see [“Management Screen” on page 40](#))


# WEB Interface FM Monitoring Receiver

## DEVICE CONTROL INTERFACE

Control interface is visually divided into three parts:


- Top – Navigational Menu;
- Middle – specific contextual readings;
- Bottom – the “dashboard” of the device - General Tuner and Channel readings, functional buttons.

**NOTE:** Bottom section of the Control Interface is persistent regardless of the current screen, allowing immediate tuner interactions.

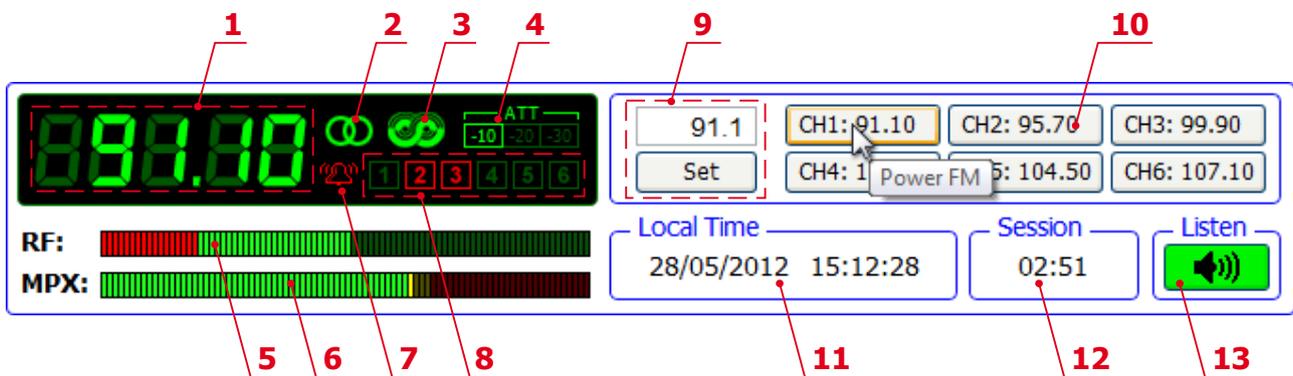


1. Frequency indicator showing currently tuned frequency;
2. Stereo indicator;
3. RDS/RBDS presence indicator;
4. RF Attenuator Status;
5. RF Level indicator. The red zone (low level) indicates RF level below 20 dB $\mu$ V;
6. MPX Level indicator;
7. Alarm presence indicator – will be lit in red when an alarm on at least one channel is detected;
8. Channel Alarms indicator – will be lit in red when the Scheduler has detected an alarm on channel. ([see “Channel Settings Screen” on page 35](#));
9. Frequency set buttons;
10. Channel Preset Buttons – when one of the buttons is pressed, the Tuner will be set to the predefined frequency. Upon hovering with the mouse over a preset button, the name of the channel will be displayed;
11. Device Time ([“Management Screen” on page 40](#));
12. Session remaining time;
13. Listen Button – Button with double usage used to Play/Stop the current audio stream (an audio device will be required).

## MAIN SCREEN

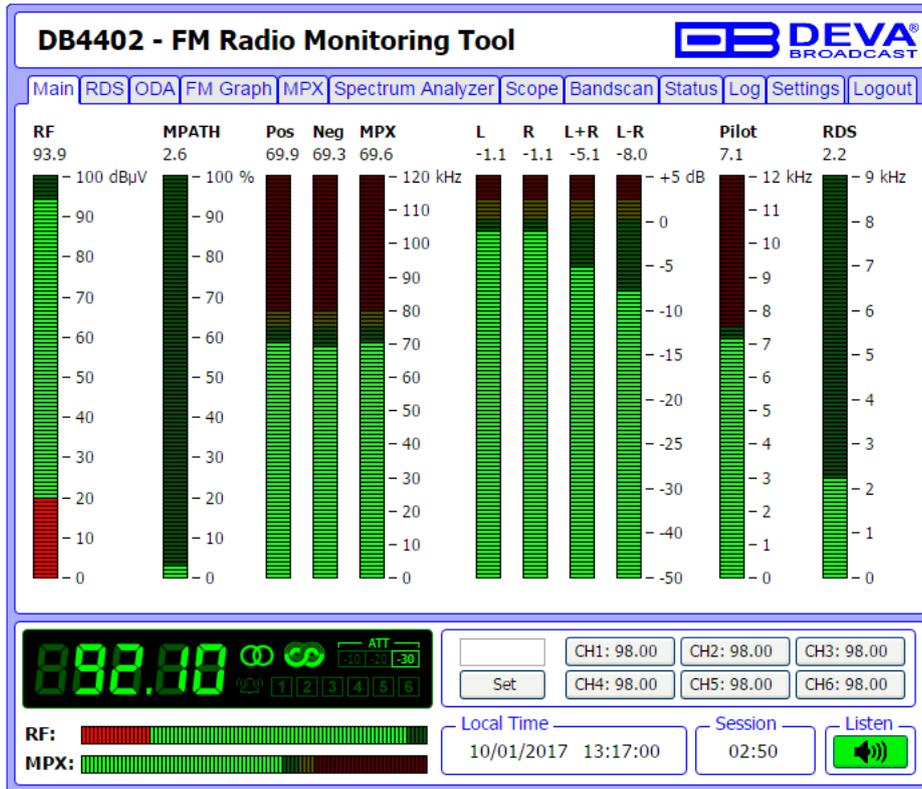

The main page shows meters for RF level, measured multipath level, baseband modulation (positive and negative peaks), audio levels, PILOT and RDS/RBDS levels.

## RDS/RBDS SCREEN

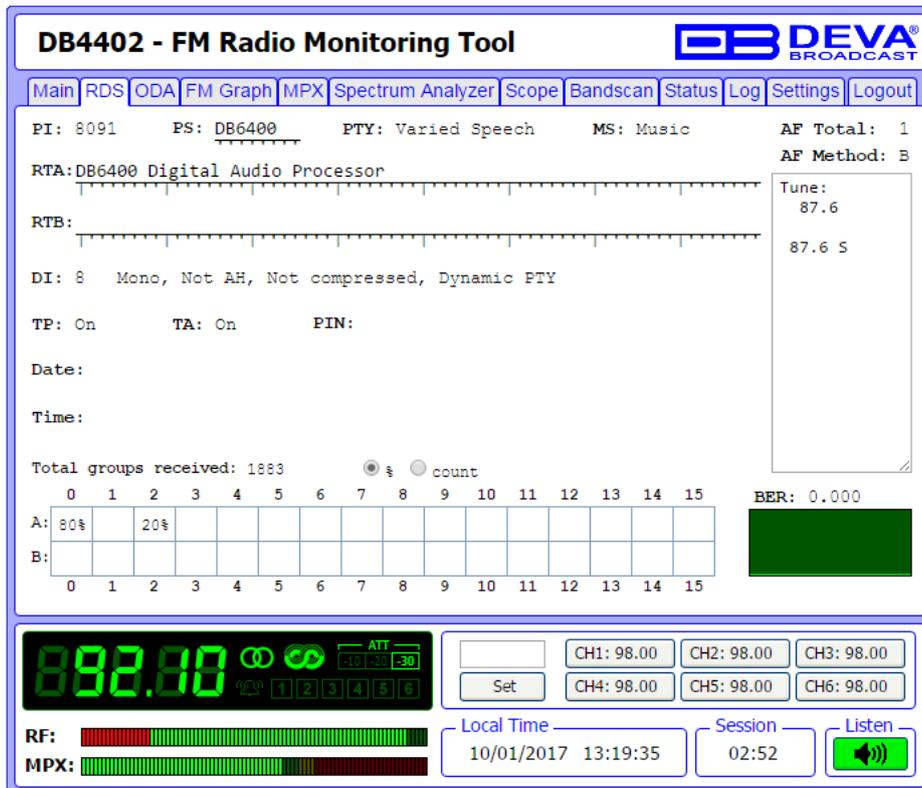


One of our core competencies lies in the RDS/RBDS. The RDS/RBDS page is very comprehensive, with a display of the RadioText (RTA and RTB), basic RDS/RBDS fields and a table of all decoded RDS/RBDS groups with a percentage measurement based on the overall RDS/RBDS data stream or group count. A very useful graph on this display is the rolling RDS/RBDS bit error rate (BER) display.

Total groups Indicator – all received groups are systematized into a table, representing the percentage/quantity of the groups in the received RDS/RBDS signal. The user selects how the “Total groups received” data should be displayed: as Percents (%) or Count, by selecting the corresponding button.

**NOTE:** The bit error rate or bit error ratio (BER) is the number of bit errors divided by the total number of transferred bits during a studied time interval. Result closer or equal to 0 indicates that no bit errors are detected and vice versa result closer or equal to 1 indicates that the received transferred bits are only errors.

## ODA SCREEN

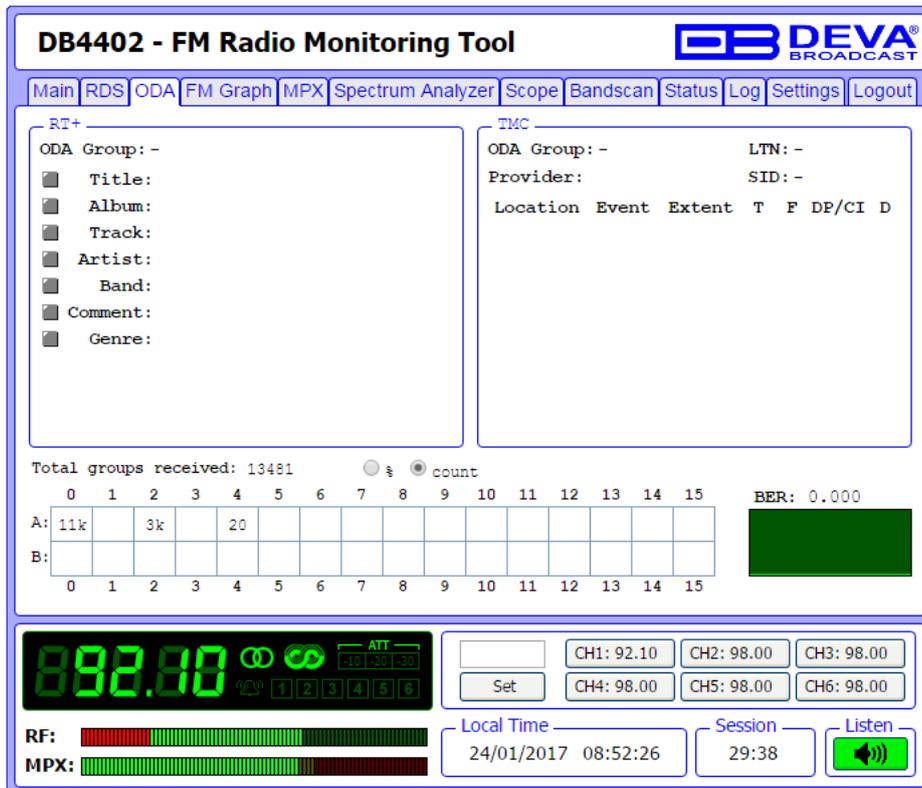

**DB4402 - FM Radio Monitoring Tool**

Main | RDS | ODA | FM Graph | MPX | Spectrum Analyzer | Scope | Bandscan | Status | Log | Settings | Logout

**RT+**

ODA Group: -

- Title:
- Album:
- Track:
- Artist:
- Band:
- Comment:
- Genre:

**TMC**

ODA Group: -                    LTN: -

Provider:                        SID: -

Location   Event   Extent   T   F   DP/CI   D

Total groups received: 13481      §      ●      count

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A:	11k		3k		20											
B:																

BER: 0.000

**892.00**      ①      ②      ③      ④      ⑤      ⑥      ⑦      ⑧      ⑨      ⑩      ⑪      ⑫      ⑬      ⑭      ⑮

RF:       Local Time: 24/01/2017 08:52:26      Session: 29:38      Listen 

MPX: 

CH1: 92.10    CH2: 98.00    CH3: 98.00  
 CH4: 98.00    CH5: 98.00    CH6: 98.00


If the selected station transmits RadioText+ (RT+) or TMC – here will be displayed the information from the supported ODA Groups.

A BER Indicator with graphics is placed at the right bottom part of the screen, showing 60 sec history of the BER quantities.





## SPECTRUM ANALYZER SCREEN

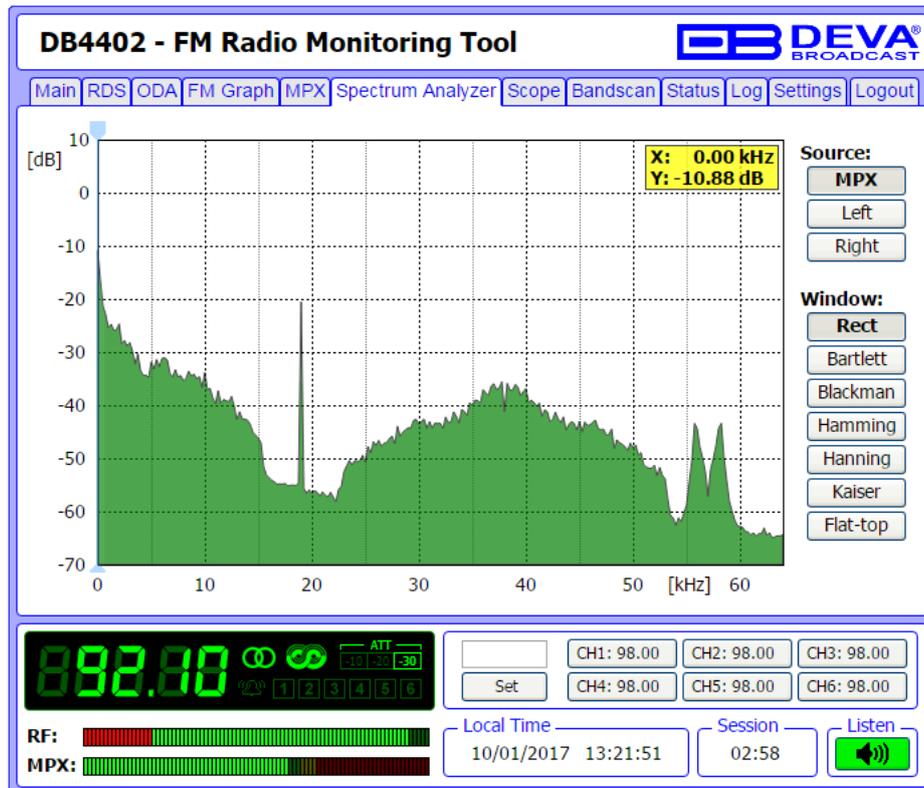


The spectrum analyzer tab is a very useful feature: It is a MPX and audio spectrum display. Initially it shows the MPX from 0-65kHz so that the readings of the currently selected source (composite MPX or stereo Left/Right) to be clearly visible. The signal source to be calculated and visualized is chosen from the Source section placed on the right part of the screen. Spectral components of the selected signal are determined on the base of Fast Fourier Transform.

The window function can be selected through the relevant menu with interactive buttons. The available windows and their features are given below. This table can be used to choose the best windowing function for each application.

Window	Best type for these Signal Types	Frequency Resolution	Spectral Leakage	Amplitude Accuracy
Rectangle	Transient & Synchronous Sampling	Best	Poor	Poor
Barlett	Random	Good	Fair	Fair
Blackman	Random or mixed	Poor	Best	Good
Hamming	Random	Good	Fair	Fair
Von Hann	Random	Good	Good	Fair
Kaiser	Random	Fair	Good	Good
Flat-top	Sinusoids	Poor	Good	Best

User-defined frequency of the spectrum can be selected by moving vertical marker along the horizontal scale. Values at the cross-point will be shown at the top right corner of the graph.

## SCOPE SCREEN

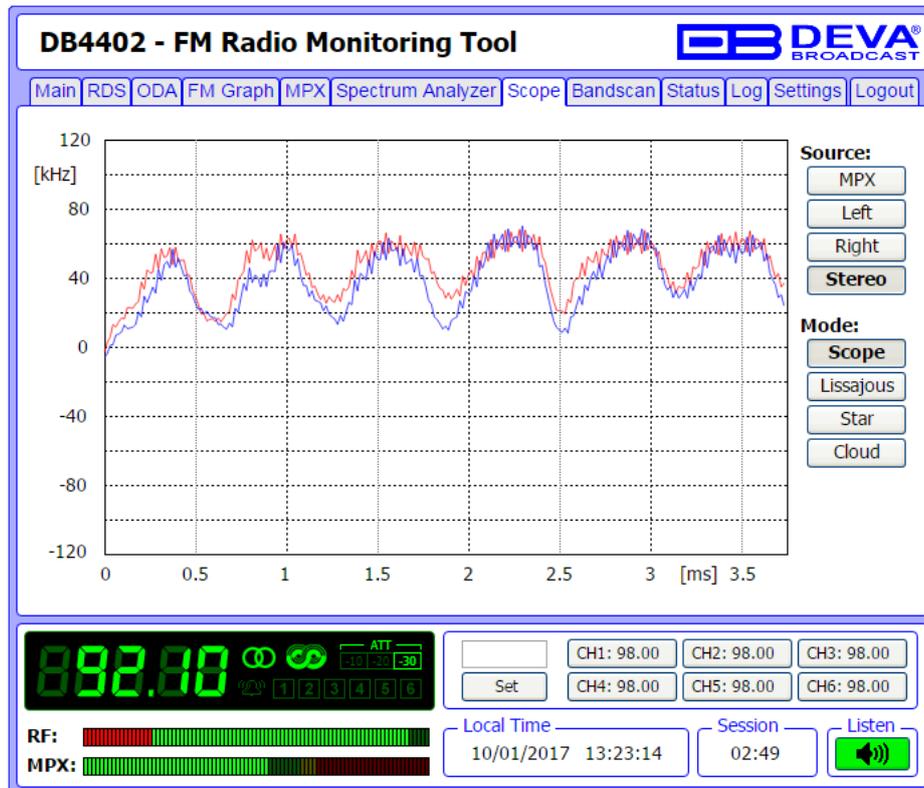


SCOPE screen represents the signals participating in the process of demodulating and stereo decoding over time. In order for the signal source to be changed, the corresponding button on the right-side of the graph should be pressed.

Once the Stereo source is selected, the following visualization modes are available:

- Scope – standard 2 channel oscilloscope;
- Lissajous – Lissajous figure representation of Left vs. Right channel;
- Star – Star-shaped representation of Left vs. Right channel;
- Cloud – Left vs. Right channel represented as cloud of points.

**NOTE:** Source “Stereo” visualizes the Left and Right signals at once.

## BANDSCAN SCREEN

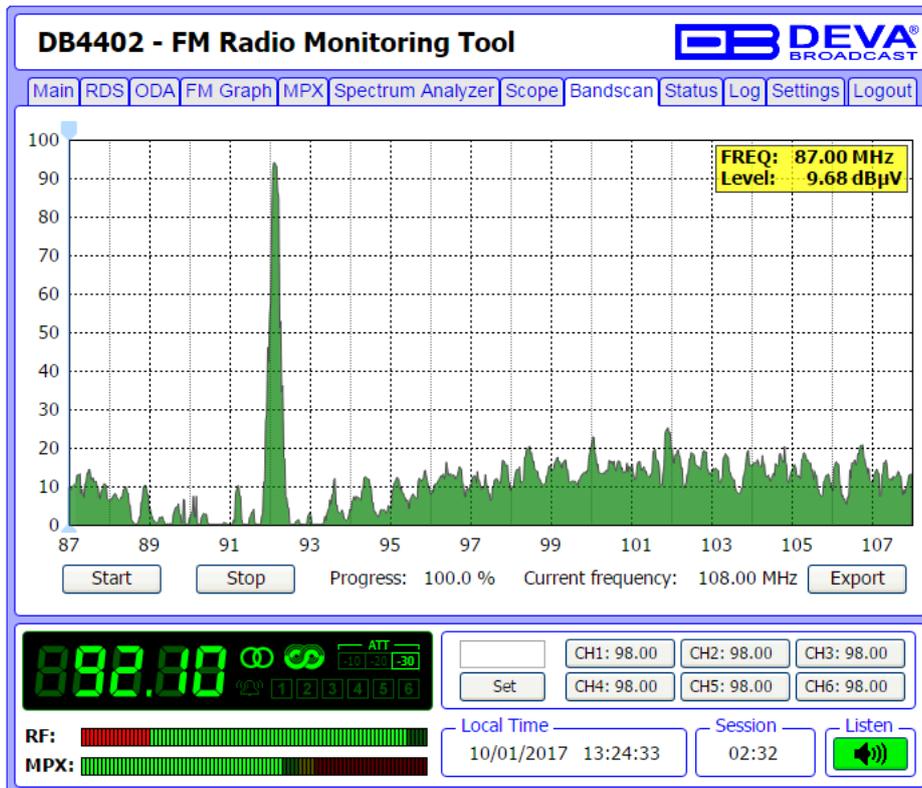


This Screen evaluates FM broadcast band congestion by sweeping the tuner across the FM band, logging every carrier and generating a spectrum display of carrier level vs. frequency.

In order for the Band scan process to be initiated, press the Start button and wait for the process to complete. The current scan could be stopped at any time by pressing the Stop button. To evaluate the RF level of specified frequency, move the vertical marker along the horizontal scale. Values at the cross-point will be shown at the top right corner of the graph.

All of the performed Band scans can be downloaded to your computer into CSV format using the “Export” button.

**NOTE:** While band scan is running, the Device Control Interface will be disabled.

## STATUS SCREEN

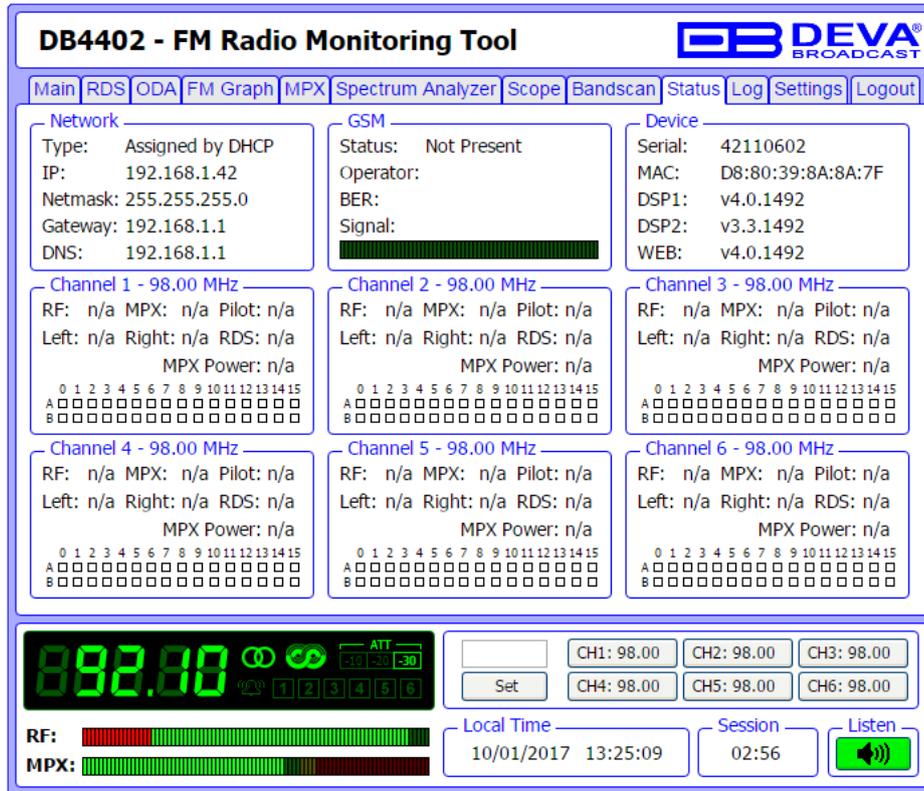

**DB4402 - FM Radio Monitoring Tool**

DEVA BROADCAST

Main | RDS | ODA | FM Graph | MPX | Spectrum Analyzer | Scope | Bandscan | **Status** | Log | Settings | Logout

**Network**  
 Type: Assigned by DHCP  
 IP: 192.168.1.42  
 Netmask: 255.255.255.0  
 Gateway: 192.168.1.1  
 DNS: 192.168.1.1

**GSM**  
 Status: Not Present  
 Operator:  
 BER:  
 Signal:

**Device**  
 Serial: 42110602  
 MAC: D8:80:39:8A:8A:7F  
 DSP1: v4.0.1492  
 DSP2: v3.3.1492  
 WEB: v4.0.1492

**Channel 1 - 98.00 MHz**  
 RF: n/a MPX: n/a Pilot: n/a  
 Left: n/a Right: n/a RDS: n/a  
 MPX Power: n/a

**Channel 2 - 98.00 MHz**  
 RF: n/a MPX: n/a Pilot: n/a  
 Left: n/a Right: n/a RDS: n/a  
 MPX Power: n/a

**Channel 3 - 98.00 MHz**  
 RF: n/a MPX: n/a Pilot: n/a  
 Left: n/a Right: n/a RDS: n/a  
 MPX Power: n/a

**Channel 4 - 98.00 MHz**  
 RF: n/a MPX: n/a Pilot: n/a  
 Left: n/a Right: n/a RDS: n/a  
 MPX Power: n/a

**Channel 5 - 98.00 MHz**  
 RF: n/a MPX: n/a Pilot: n/a  
 Left: n/a Right: n/a RDS: n/a  
 MPX Power: n/a

**Channel 6 - 98.00 MHz**  
 RF: n/a MPX: n/a Pilot: n/a  
 Left: n/a Right: n/a RDS: n/a  
 MPX Power: n/a

892.00  
 ATT -10 -20 -30  
 1 2 3 4 5 6

RF: [Signal strength bar]  
 MPX: [Signal strength bar]

Local Time: 10/01/2017 13:25:09  
 Session: 02:56  
 Listen [Speaker icon]

The status tab shows the alarm status of each parameter of the preset frequencies, along with the basic device and network status (IP address, MAC, etc.).

The Channel parameters (RF, MPX, Pilot etc.) have several conditions:

- In range – green OK. ([“Channel Settings Screen” on page 35](#))
- Out of range – red LO or HI;
- Signal monitoring is not enabled – n/a.

The status of the RDS/RBDS Groups Alarm is displayed on the bottom of the channels’ section:

- Green – RDS/RBDS Group is received;
- Red – RDS/RBDS Group is not received and an alarm has been triggered;
- White (blank) – RDS/RBDS Group is not received and no alarm has been triggered.

## LOG SCREEN

**DB4402 - FM Radio Monitoring Tool**

Main | RDS | ODA | FM Graph | MPX | Spectrum Analyzer | Scope | Bandscan | Status | Log | Settings | Logout

```
[24.01.2017, 07:12:23] Power on.  
[24.01.2017, 07:51:08] User logged in from IP address 213.169.54.162.  
[24.01.2017, 07:52:15] User logged out.  
[24.01.2017, 08:30:26] User logged in from IP address 213.169.54.162.  
[24.01.2017, 08:30:28] User logged out.  
[24.01.2017, 08:32:37] User logged in from IP address 213.169.54.162.  
[24.01.2017, 08:32:39] User logged out.  
[24.01.2017, 08:32:45] User logged in from IP address 213.169.54.162.
```

General  Channel 1  Channel 2  Channel 3  Channel 4  Channel 5  Channel 6

RF:  MPX: 

89.200

CH1: 92.10 CH2: 98.00 CH3: 98.00  
Set CH4: 98.00 CH5: 98.00 CH6: 98.00

Local Time: 24/01/2017 08:57:39 Session: 29:24 Listen 


This screen shows the Device Log, which shows the last 100 important events. Selecting/deselecting the corresponding check-boxes will filter the events by type.

## SETTINGS SCREEN

**WARNING:** The applied changes will take effect upon pressing the **SAVE** button. All settings marked with  require Reboot hence the **Save & Reboot** button should be used. Navigation through the screens will revert to the last saved changes.

**NOTE:** The edited field will become red if the new value is invalid or out of range.

### Main Settings Screen

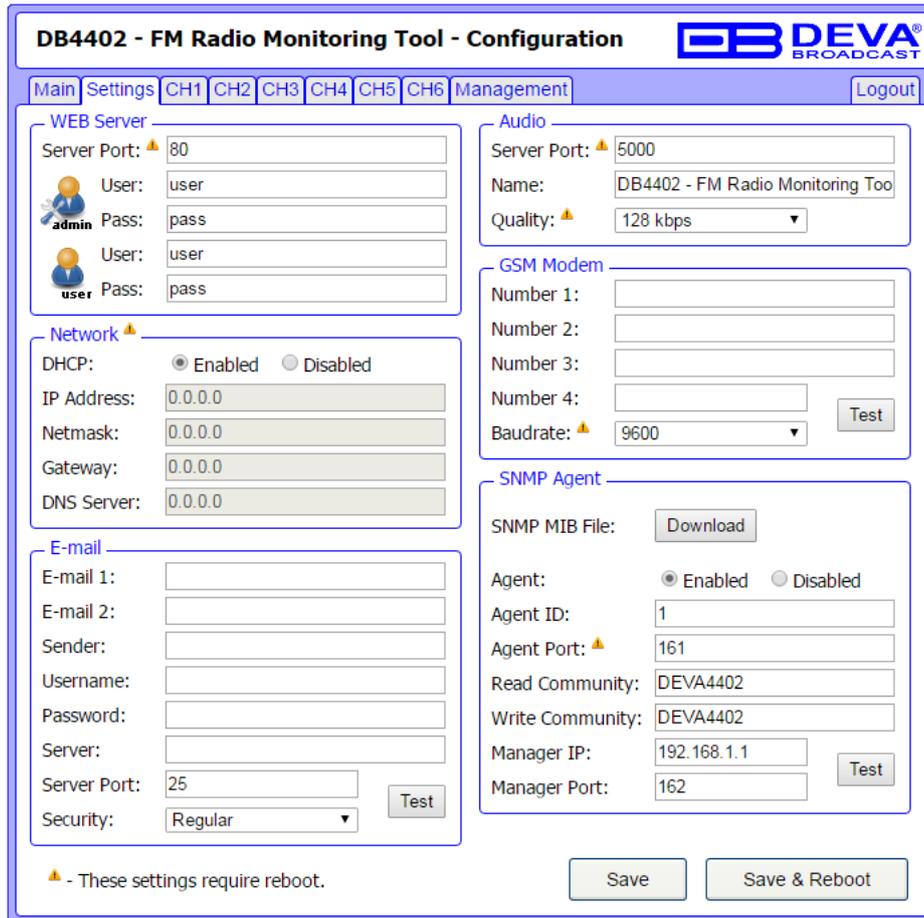

**DB4402 - FM Radio Monitoring Tool - Configuration**

Main Settings CH1 CH2 CH3 CH4 CH5 CH6 Management Logout

**WEB Server**

Server Port:

User:

Pass:

User:

Pass:

**Network**

DHCP:  Enabled  Disabled

IP Address:

Netmask:

Gateway:

DNS Server:

**E-mail**

E-mail 1:

E-mail 2:

Sender:

Username:

Password:

Server:

Server Port:

Security:

**Audio**

Server Port:

Name:

Quality:

**GSM Modem**

Number 1:

Number 2:

Number 3:

Number 4:

Baudrate:

**SNMP Agent**

SNMP MIB File:

Agent:  Enabled  Disabled

Agent ID:

Agent Port:

Read Community:

Write Community:

Manager IP:

Manager Port:

 - These settings require reboot.

### WEB Server

Enter desired WEB Server Port, Username and Password to be used when accessing the WEB Server. There are 2 levels of access. Admin can access all screens and change all settings. The user can access only the operational screens and has no access to the settings.

### Network

The network addresses could be set manually (static IP) or automatically via the DHCP server. To set static IP, MASK, GATEWAY and DNS addresses, the DHCP should be disabled. In order for the built-in DHCP client to be activated, the function should be enabled. As a result, all network addresses will become read-only. When the DHCP client is activated, all assigned values will be shown in the relevant fields of the [“Status Screen”](#). If due to any reason, the DHCP procedure cannot be completed, DB4402 will use AutoIP and will generate an IP Address.

### E-mail

Enter desired alarm recipients into e-mail 1 and/or e-mail 2 fields. Fill in your e-mail account settings: Sender, Username and Password, Server and corresponding port. It is mandatory the type of connection with the server to be specified from Security - Regular, STARTTLS, SSL/TLS. The Server port will be changed accordingly. Please note that the most commonly used port will be entered in the field. If the port that is to be used is different, change it manually to the correct value.

We recommend you to use the 'Test' button and generate test e-mail, which upon success will be delivered to specified E-mail 1 and/or E-mail 2.

Example of Test E-mail Message:

```
DB4402 Test Message.  
Please do not reply to this e-mail.
```

### Audio

Specify Port for audio Streaming, Name of the stream (which is used also for email sender name and web title) and Quality (64, 96, 128, 192 or 256 kbps). The Audio Stream could be heard using suitable audio player (MS Media Player or Winamp) or through a WEB interface by pressing the "Listen" button.

### GSM Modem

Up to four numbers for SMS alarm notifications could be set. Baud Rate is mandatory for the proper operation of the GSM Modem.

We recommend a test SMS to be generated (via pressing the 'Test' button), once all needed settings are applied. Upon success, the SMS will be delivered to all specified GSM numbers.

Example of Test SMS Message:

```
DB4402 Test Message
```

**NOTE:** The current condition of the GSM Modem could be checked in the ["Status Screen"](#).

### SNMP

Specify Agent ID, Agent Port, Read/Write Communities, Manager IP and Manager Port.  
Agent - enables/disables SNMP Agent.

**NOTE:** Agent ID is used for identification of the device among others when an SNMP notification is sent.

Once all needed settings are applied, use Test button to generate a test notification, which upon success will be received by the SNMP Manager.

Press the 'Download' button to download the latest available DB4402 SNMP MIB file.

**NOTE:** The MIB file may vary from one firmware revision to another. Downloading this file from the device guarantees that you have the proper MIB file.



### Channel

- Enable – enables/disables channel monitoring and sending of warnings and alarms;
- Frequency – specify the frequency to be monitored;
- Name – channel alias;
- Observation – specify the observation time for the current station (before switching to the next channel).

**NOTE:** When MPX Power alarm is enabled the observation time must be more than 70 seconds.

### Alarm Control

- Alarm – enables/disables the corresponding parameter alarm logging;
- Warning – enables/disables the corresponding parameter warning;
- E-mail – enables/disables E-mail notification;
- SMS – enables/disables SMS notification;
- SNMP – enables/disables SNMP notification.

**NOTE:** If the monitoring option is disabled, notifications will not be sent, nevertheless whether they are enabled or disabled. A click on the label (left or above) will enable/disable the entire column/row.

To ensure early notification in case of a potential or actual problem, the DB4402 provides two-stage alarm notifications.

- Stage 1 – Warning for a potential problem. It has a narrower range;
- Stage 2 – Alarm for actual problem. It has a wider range.

### Alarm

- Alarm Range – interactive slider used to adjust the Low & High thresholds at which an alarm will be generated;
- Warning range – interactive slider used to adjust the Low & High thresholds at which a warning for possible problem will be generated;
- Trigger Time – waiting time before Active Alarm/Warning is generated;
- Release Time – waiting time before Idle Alarm/Warning is generated;
- RDS/RBDS Group Alarm – alarm only for selected groups will be generated.

**IMPORTANT NOTE:** Alarms are generated only when the Logger mode is running. Until there is any user interaction, alarm will not be generated and send. The Logger starts running once the user logs out of the WEB interface.


The release time defines the time, which should elapse in order for the received signal to be defined as restored/OK. The release time is user-defined. What we recommend is the release time to be bigger than the trigger time.

**NOTE:** When setting Trigger and Release times, have in mind that 01:00 means 1 minute, and 00:01 means 1 second.

## ALARM / WARNING TRIGGERS DEFINED


After collecting all the data the DB4402 DSP core compares the values measured with the predefined by the user threshold levels for all the channels monitored. In case that any parameter is out of its limits or a potential problem has been detected, the device will initiate the sending of alarm/warning notification via the alarm type selected. All the alarms/warnings are stored in the device's log. You have to have in mind that, if there is a very short fault of the signal, with duration less than the 'channel trigger time', the device would not trigger an alarm/warning.

There are several Alarm/Warning Triggers for the following parameters: RF, MPX, MPX Power, Left/Right Audio, RDS and Pilot levels. There is an option for defining different limits for each of the parameters. All these values, the 'trigger time' and the 'release time' have to be assigned separately for each of the channels.

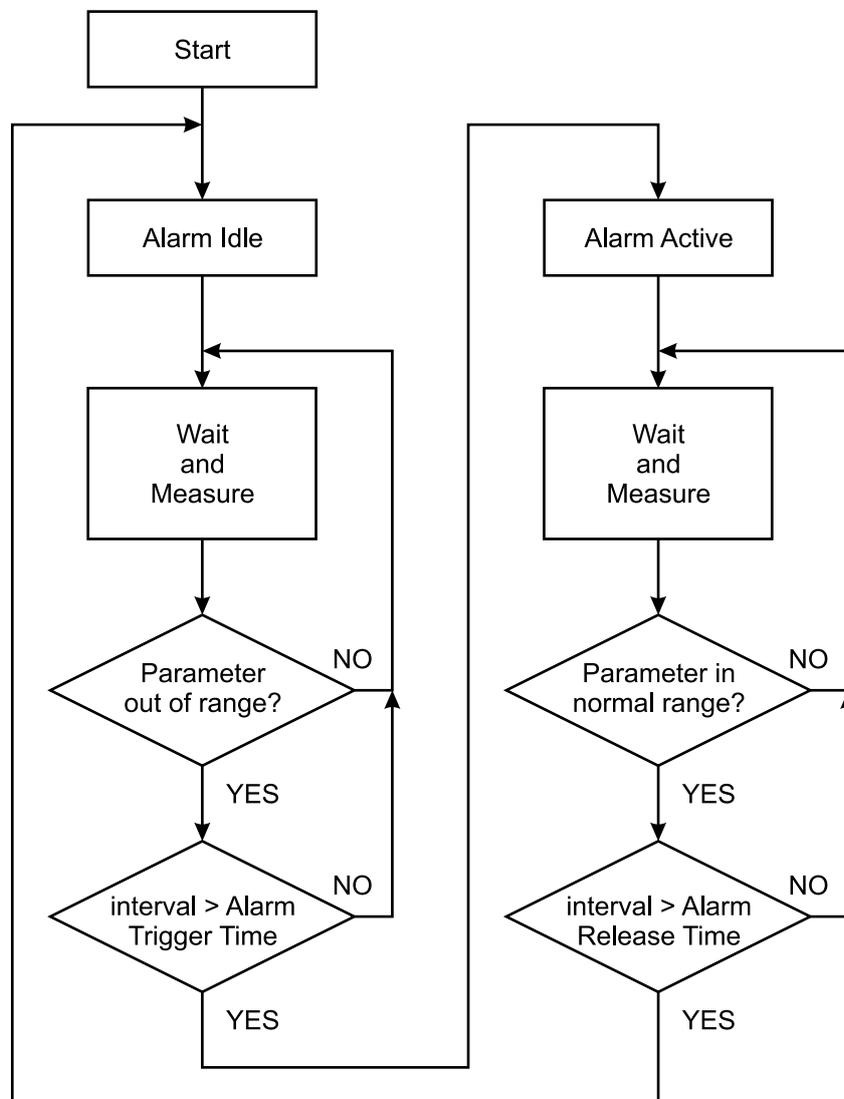

**Block Diagram of Alarm Automata**

Every time an observation event takes place, the Alarm/Warning Trigger's State of the channel refreshes (if necessary). For example: Let's suppose that the Alarm/Warning Trigger is in Idle state. Note, that an alarm is not triggered immediately when a parameter level passes over threshold (above High Threshold or under Low Threshold). If the parameter level becomes stable (within Thresholds) and Alarm/Warning Trigger Time is not elapsed, then Alarm/Warning Trigger remains in Idle state. If Alarm/Warning Trigger Time expires and the parameter level is still out of bounds, then Alarm/Warning Trigger changes its state to Active. This causes predefined actions - Alarm/Warning Notifications (E-mail, SMS, SNMP trap) and Save a Log Record. The state will not be immediately changed to Idle when the parameter stabilizes (within Threshold levels), but will wait until 'Alarm/Warning Release Time' is elapsed. Meanwhile if the parameter passes over again any Threshold, the Alarm/Warning Trigger will remain in Active state. If the parameter remains within Threshold levels and Alarm/Warning Release Time expires, Alarm/Warning Trigger switches to Idle state and again predefined actions are initiated (as when entering Active state).

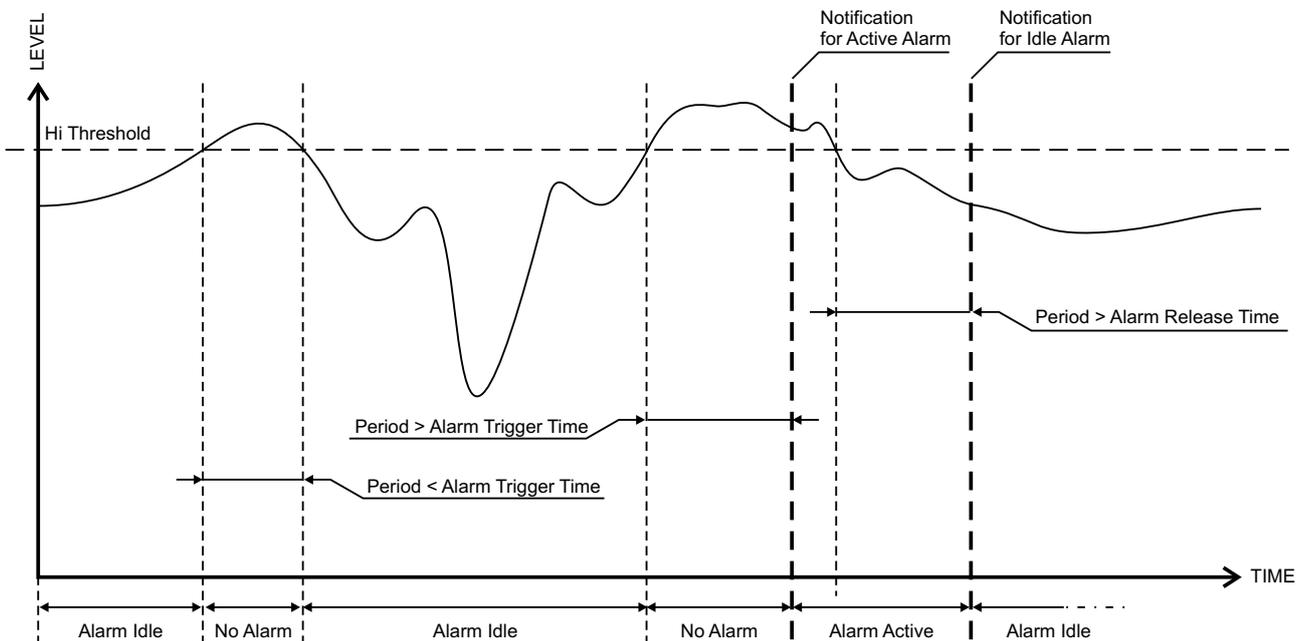

If RDS Group has not been received for more than Alarm/Warning Trigger Time state is changed to Active. If state is Active and Release Time has elapsed and the RDS Group is received state is changed to Idle. If the RDS Group is received before the Release Time is elapsed state remains Active.

## ALARM NOTIFICATIONS

---

Alarm/Warning Notifications (E-mail, SMS, SNMP trap) consist of DB4402 Alias ([see “Main Settings Screen” on page 33](#)), date and time of Alarm/Warning triggered, channel number, frequency and information for Alarm/Warning activation or deactivation. The basic signal parameters are evaluated and included as well.

Because of the SMS length limitations, only most important parameters are included, when sending SMS Notifications.

### Example for E-mal Notification:

Date: 27 Sep 2011, 09:05:09

DB4402 - FM Radio Monitoring Tool reports ACTIVE alarm on 95.70MHz  
- BG Radio (CH2)

Alarm: RF < 40dBuV

Signal parameters:

RF Level: 64.6 dBuV

MPX: 65.8 kHz

Left: -1.6 dB

Right: -1.9 dB

Pilot: 7.95 kHz

RDS: 4.47 kHz

Multipath: 3.3 %

### Example for SMS Notification:

ACTIVE ALARM:CH#2

27.09.2011 09:08:34

FREQ:95.7MHz

RF:35.0dBuV \*L\*

MPX:60.3kHz

Left:-2.8dB


Right:-3.1dB

Pilot:7.92kHz

RDS:4.12kHz

**NOTE:** \*L\* for LOW (below threshold), \*H\* for HIGH (above threshold)

## MANAGEMENT SCREEN

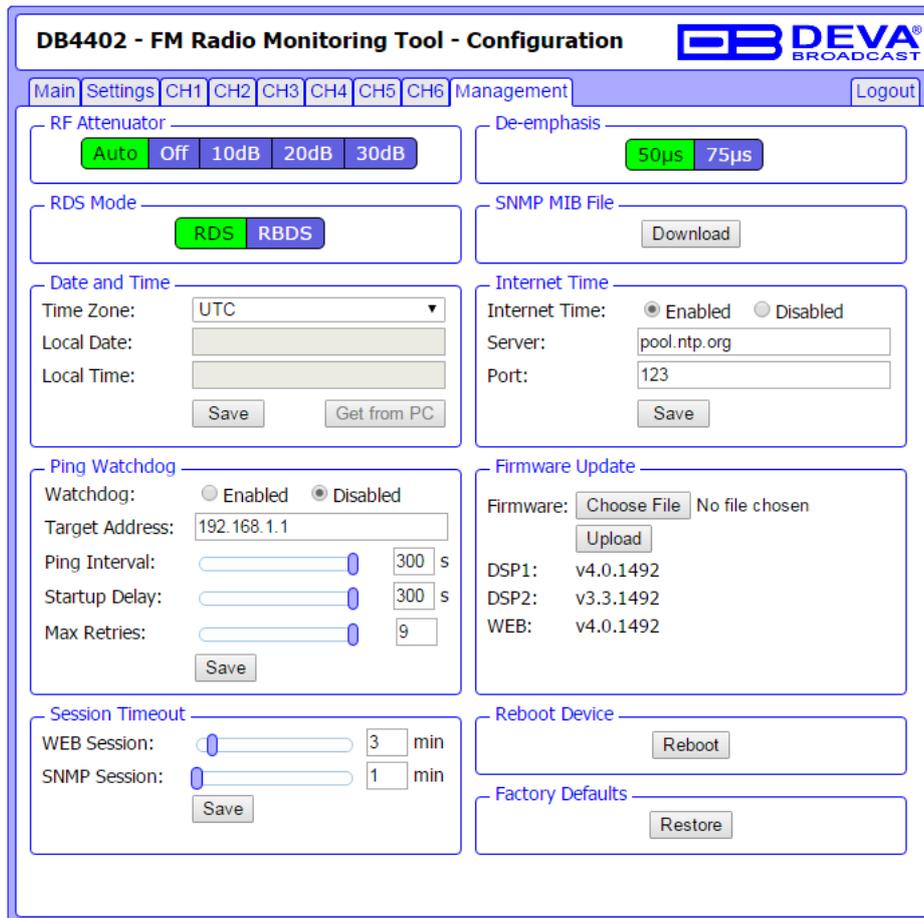

The screenshot displays the 'Management' configuration page for the DB4402 FM Radio Monitoring Tool. The page is organized into several sections:

- RF Attenuator:** Buttons for 'Auto', 'Off', '10dB', '20dB', and '30dB'. 'Auto' is currently selected.
- De-emphasis:** Buttons for '50µs' and '75µs'. '50µs' is currently selected.
- RDS Mode:** Buttons for 'RDS' and 'RBDS'. 'RDS' is currently selected.
- SNMP MIB File:** A 'Download' button.
- Date and Time:** Fields for 'Time Zone' (set to UTC), 'Local Date', and 'Local Time'. Includes 'Save' and 'Get from PC' buttons.
- Internet Time:** Radio buttons for 'Enabled' (selected) and 'Disabled'. Fields for 'Server' (pool.ntp.org) and 'Port' (123). Includes a 'Save' button.
- Ping Watchdog:** Radio buttons for 'Enabled' and 'Disabled' (selected). Fields for 'Target Address' (192.168.1.1), 'Ping Interval' (300 s), 'Startup Delay' (300 s), and 'Max Retries' (9). Includes a 'Save' button.
- Firmware Update:** 'Choose File' button (No file chosen), 'Upload' button, and version information for DSP1 (v4.0.1492), DSP2 (v3.3.1492), and WEB (v4.0.1492).
- Session Timeout:** Sliders for 'WEB Session' (3 min) and 'SNMP Session' (1 min). Includes a 'Save' button.
- Reboot Device:** A 'Reboot' button.
- Factory Defaults:** A 'Restore' button.

### RF Attenuator

Indicates the Antenna Input Attenuator's setting. Attenuation level can be selected by pressing on the preferred value. When AUTO is selected, DB4402 will adjust automatically the Attenuator's position.

### De-emphasis

Indicates currently selected de-emphasis.

### Date and Time / Internet Time

When Internet Time is enabled, DB4402 will automatically adjust its internal clock through the Internet. When Internet Time is disabled, Date and Time should be entered manually into corresponding fields or filled from PC Clock by pressing the 'Get From PC' button.

### Ping Watchdog

The idea of this feature is a connection to DB4402 over the Internet to be established if the device is connected behind a mobile router. If there is no connection with the Internet, some mobile routers disconnect their radios and the DB4402 will become inaccessible. The Ping Watchdog will make enough traffic for the router to stay connected to the network. Reboot is needed because there are some routers that nevertheless the ping, will disconnect. Reconnection will be made only if there is a disconnect and connect at the LAN port.

The Ping Watchdog will ping the specified IP address for connection status. If the remote IP address does not respond to Ping for the specified number of times (Max Retries), the DB4402 will power reboot. Please note that the 'Ping Watchdog' is disabled by default.

### Firmware Update

If needed, DB4402's firmware could be updated. Updating the firmware will ensure:

- New function(s);
- Improved performance;
- Eliminated bugs (if any).

To update the device firmware, please follow the steps listed below:

- Press the 'Browse'/'Choose File' button and select the new firmware file;
- Press the "Upload" button;
- Wait for the process to complete.

**NOTE:** Checking for updates regularly will ensure that the device is functioning correctly, and avoid potential problems.

### Reboot Device

Pressing Reboot button will initiate a 'hardware reset' as if you have switched off and on the device. The previously applied/saved settings will not be deleted.

### Factory Defaults

DB4402 could be restored to Factory Defaults from its non-volatile memory. The procedure is quite simple - Press the 'Restore Button' and confirm the procedure.

**WARNING:** Before returning DB4402 to its factory defaults, all remote users should be informed that they may cease to communicate with the device.

### Session Timeout

Set WEB and SNMP sessions timeout. **PLEASE NOTE** that during session, the Logger mode is not active, thus no Alarms are generated.

### SNMP MIB File

Press the 'Download' button to download the latest available DB4402 SNMP MIB file.

**NOTE:** The MIB file may vary from one firmware revision to another. Downloading this file from the device guarantees that you have the proper MIB file.


# WEB Interface FM Radio Streamer

## DEVICE CONTROL INTERFACE

Control interface is visually divided into three parts:


- Top – Navigational Menu;
- Middle – specific contextual readings;
- Bottom – the “dashboard” of the device - General Tuner and Channel readings, functional buttons.

**NOTE:** Bottom section of the Control Interface is persistent regardless of the current screen, allowing immediate tuner interactions.

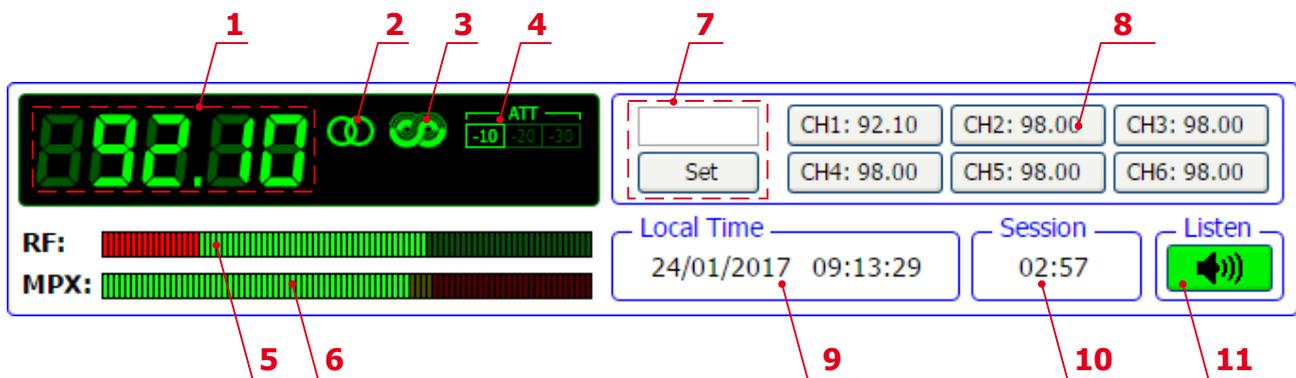


1. Frequency indicator showing currently tuned frequency;
2. Stereo indicator;
3. RDS/RBDS presence indicator;
4. RF Attenuator Status;
5. RF Level indicator. The red zone (low level) indicates RF level below 20 dB $\mu$ V;
6. MPX Level indicator;
7. Frequency set buttons;
8. Channel Preset Buttons – when one of the buttons is pressed, the Tuner will be set to the predefined frequency. Upon hovering with the mouse over a preset button, the name of the channel will be displayed. The preset buttons are set in the Presets tab. For detailed information, [refer to “Presets” on page 51](#).
9. Device Time ([“Management Screen” on page 52](#));
10. Session remaining time;
11. Listen Button – Button with double usage used to Play/Stop the current audio stream (an audio device will be required).

## MAIN SCREEN

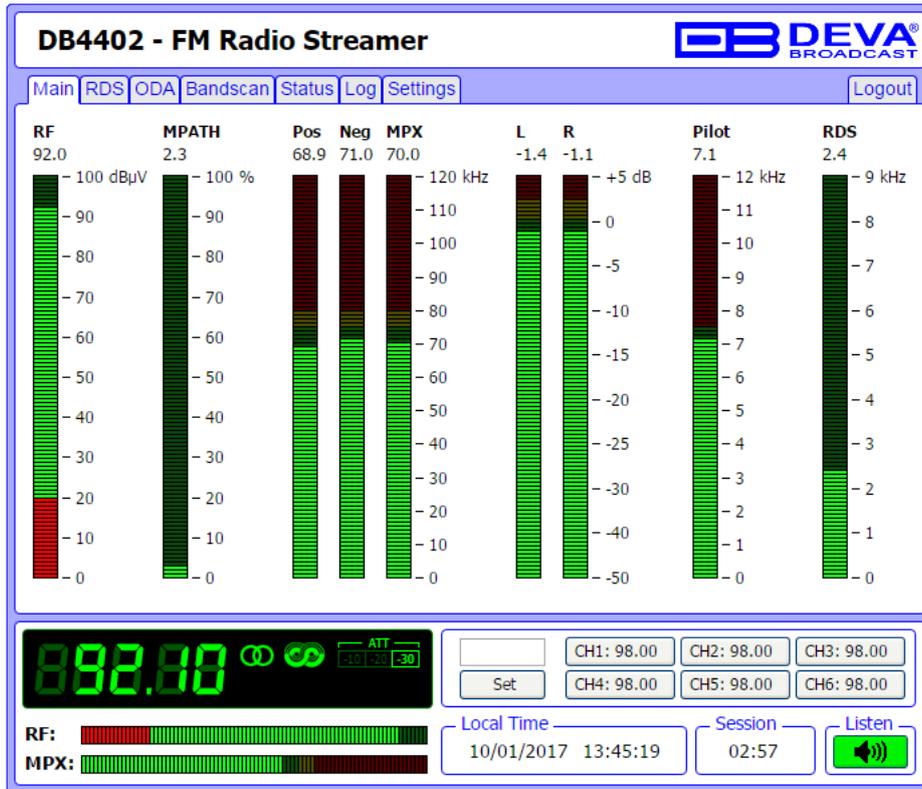

The main page shows meters for RF level, measured multipath level, baseband modulation (positive and negative peaks), audio levels, PILOT and RDS/RBDS levels.

## RDS/RBDS SCREEN

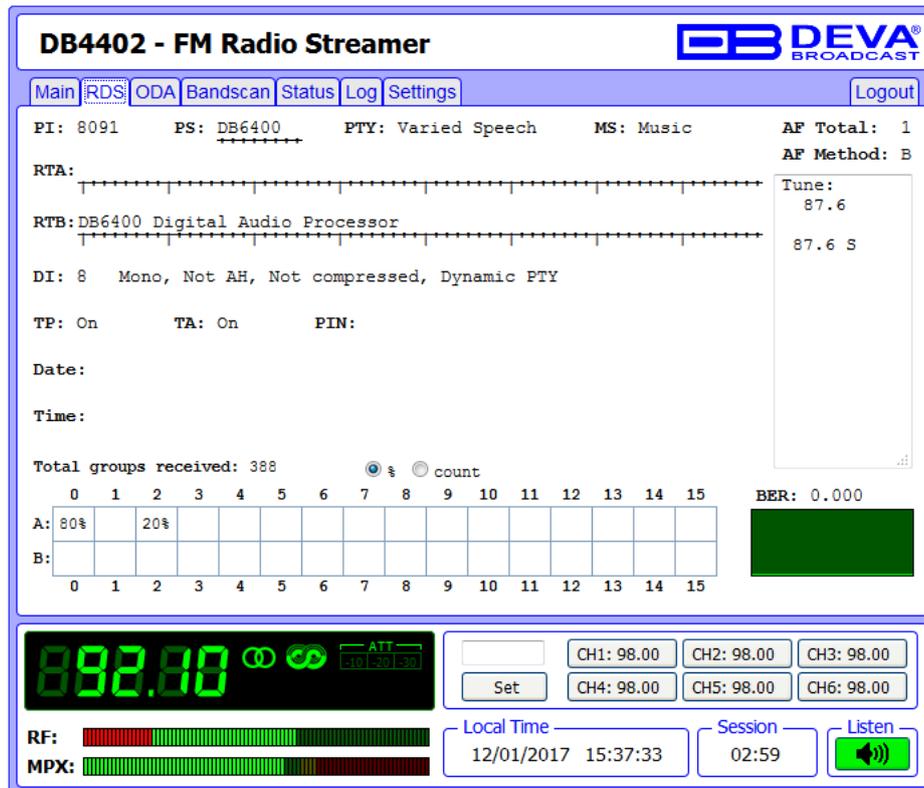


One of our core competencies lies in the RDS/RBDS. The RDS/RBDS page is very comprehensive, with a display of the RadioText (RTA and RTB), basic RDS/RBDS fields and a table of all decoded RDS/RBDS groups with a percentage measurement based on the overall RDS/RBDS data stream or group count. A very useful graph on this display is the rolling RDS/RBDS bit error rate (BER) display.

Total groups Indicator – all received groups are systematized into a table, representing the percentage/quantity of the groups in the received RDS/RBDS signal. The user selects how the “Total groups received” data should be displayed: as Percents (%) or Count, by selecting the corresponding button.

**NOTE:** The bit error rate or bit error ratio (BER) is the number of bit errors divided by the total number of transferred bits during a studied time interval. Result closer or equal to 0 indicates that no bit errors are detected and vice versa result closer or equal to 1 indicates that the received transferred bits are only errors.

## ODA SCREEN

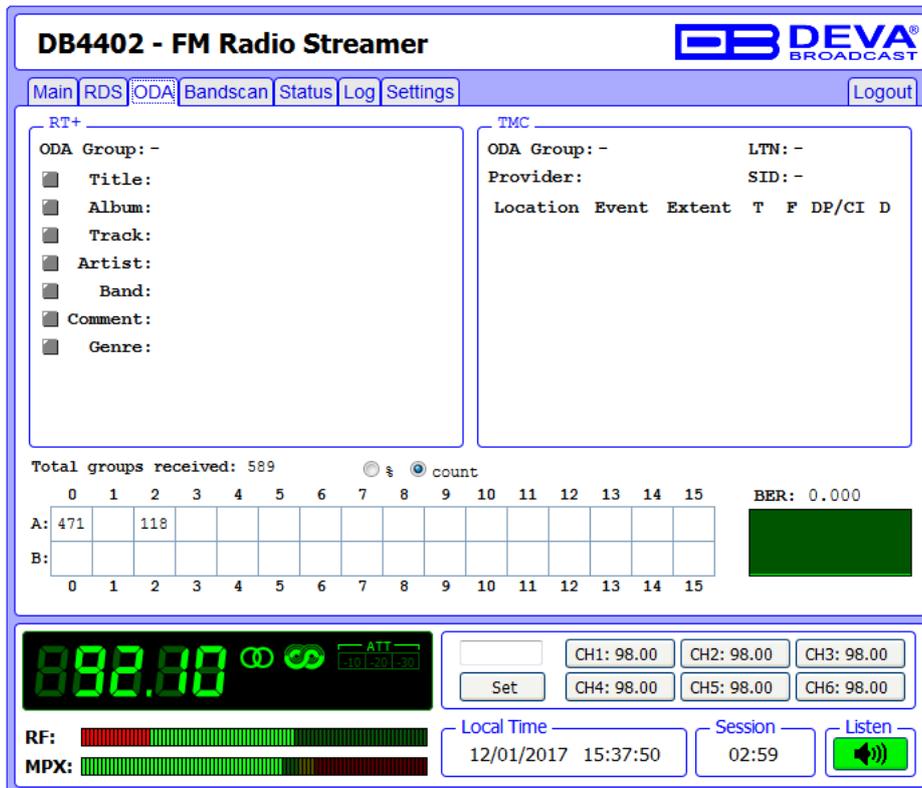

**DB4402 - FM Radio Streamer**

Main | RDS | ODA | Bandscan | Status | Log | Settings | Logout

**RT+**

ODA Group: -

- Title:
- Album:
- Track:
- Artist:
- Band:
- Comment:
- Genre:

**TMC**

ODA Group: - LTN: -

Provider: - SID: -

Location Event Extent T F DP/CI D

Total groups received: 589    count

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A:	471		118													
B:																

BER: 0.000

**892.00**    ATT 30 30 30

RF:     Local Time: 12/01/2017 15:37:50    Session: 02:59    Listen 


MPX:     CH1: 98.00    CH2: 98.00    CH3: 98.00

Set    CH4: 98.00    CH5: 98.00    CH6: 98.00

If the selected station transmits RadioText+ (RT+) or TMC – here will be displayed the information from the supported ODA Groups.

A BER Indicator with graphics is placed at the right bottom part of the screen, showing 60 sec history of the BER quantities.

## BANDSCAN SCREEN

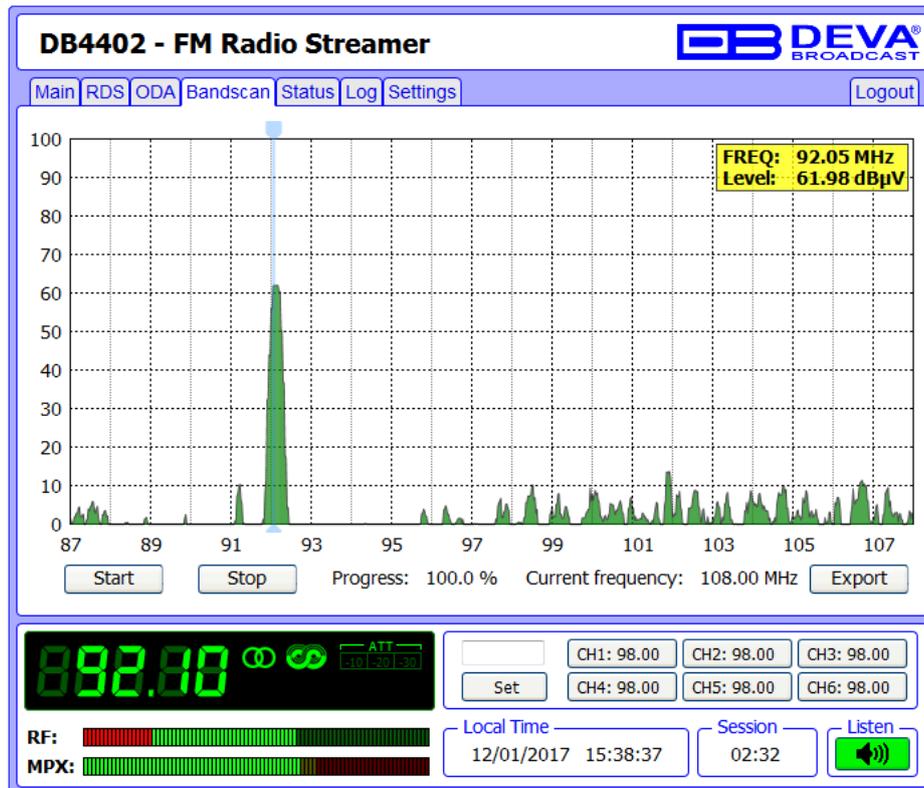

This Screen evaluates FM broadcast band congestion by sweeping the tuner across the FM band, logging every carrier and generating a spectrum display of carrier level vs. frequency.

In order for the Band scan process to be initiated, press the Start button and wait for the process to complete. The current scan could be stopped at any time by pressing the Stop button. To evaluate the RF level of specified frequency, move the vertical marker along the horizontal scale. Values at the cross-point will be shown at the top right corner of the graph.

All of the performed Band scans can be downloaded to your computer into CSV format using the “Export” button.

**NOTE:** While band scan is running, the Device Control Interface will be disabled.

## STATUS SCREEN

The screenshot displays the 'DB4402 - FM Radio Streamer' status screen. At the top, there are navigation tabs: Main, RDS, ODA, Bandscan, Status (selected), Log, Settings, and Logout. The main content area is divided into three sections: Network, GSM, and Device. The Network section shows IP: 192.168.1.43, Netmask: 255.255.255.0, Gateway: 192.168.1.1, and DNS: 192.168.1.1. The GSM section shows Status: Not Present, Operator: (empty), BER: (empty), and Signal: (empty). The Device section shows Serial: 43110602, MAC: D8:80:39:8A:88:0A, DSP1: v4.0.1492, DSP2: v3.3.1492, and WEB: v4.0.1492. Below these sections is a digital display showing '892.00' with various icons and a 'Set' button. To the right of the display are buttons for CH1 through CH6, all set to 98.00. At the bottom, there are RF and MPX signal strength bars, Local Time (10/01/2017 13:46:18), Session (02:56), and a Listen button.

Information on the basic device and network status (IP address, MAC, etc.) is available in this section. If a GSM modem is connect to the DB4402, information on its current status will also be available.

## LOG SCREEN

**DB4402 - FM Radio Streamer**

Main | RDS | ODA | Bandscan | Status | **Log** | Settings | Logout

```
[12.01.2017, 13:02:25] Power on.  
[12.01.2017, 13:58:11] User logged in from IP address 89.173.154.28.  
[12.01.2017, 14:04:19] User timeout.  
[12.01.2017, 15:36:59] User logged in from IP address 213.169.54.162.  
[12.01.2017, 15:38:08] Bandscan started...  
[12.01.2017, 15:38:32] Bandscan stopped.
```

General  Channel 1  Channel 2  Channel 3  Channel 4  Channel 5  Channel 6

89.200   ATT 10 20 30

Set CH1: 98.00 CH2: 98.00 CH3: 98.00  
CH4: 98.00 CH5: 98.00 CH6: 98.00

RF:  Local Time 12/01/2017 15:39:20 Session 02:59 Listen 

MPX: 


This screen contains the device's Log, which shows the last 100 important events. Selecting/deselecting the corresponding check-boxes will filter the events by type.

## SETTINGS SCREEN

**WARNING:** The applied changes will take effect upon pressing the **SAVE button**. All settings marked with  require Reboot hence the **Save & Reboot button** should be used. Navigation through the screens will revert to the last saved changes.

**NOTE:** The edited field will become red if the new value is invalid or out of range.

### Main Settings Screen

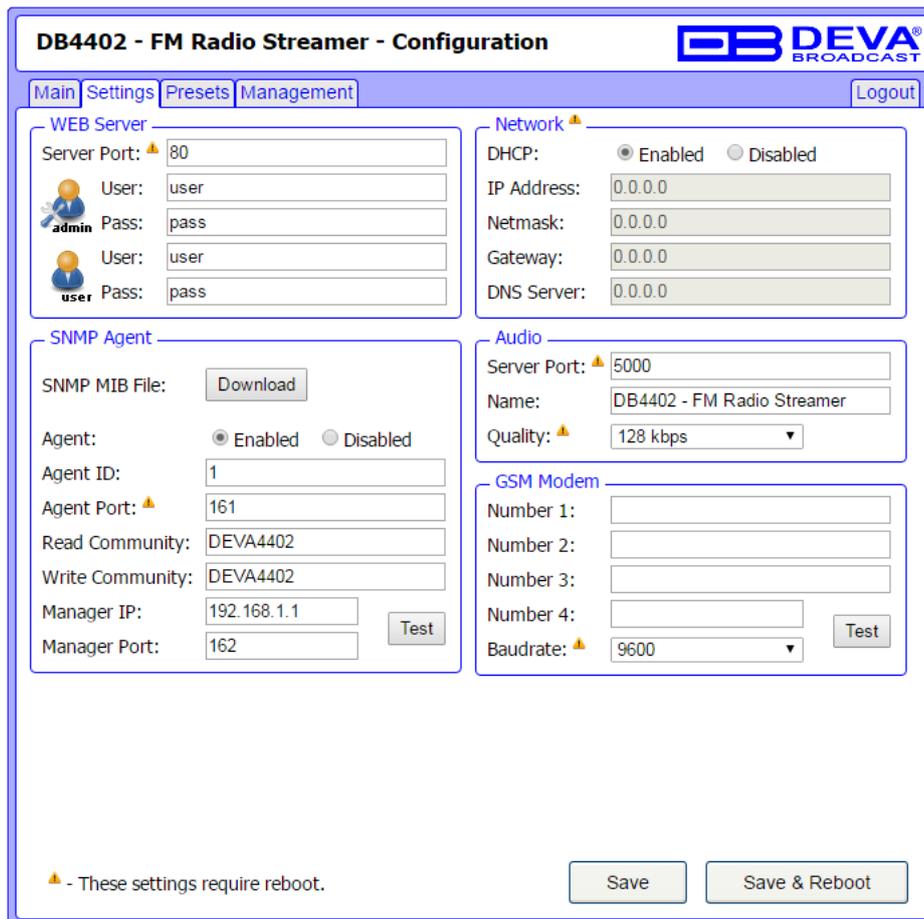

**DB4402 - FM Radio Streamer - Configuration**

Main Settings Presets Management Logout

**WEB Server**

Server Port:

User:  Pass:

User:  Pass:

**Network**

DHCP:  Enabled  Disabled

IP Address:

Netmask:

Gateway:

DNS Server:

**SNMP Agent**

SNMP MIB File:

Agent:  Enabled  Disabled

Agent ID:

Agent Port:

Read Community:

Write Community:

Manager IP:

Manager Port:

**Audio**

Server Port:

Name:

Quality:

**GSM Modem**

Number 1:

Number 2:

Number 3:

Number 4:

Baudrate:

 - These settings require reboot.

### WEB Server

Enter desired WEB Server Port, Username and Password to be used when accessing the WEB Server. There are 2 levels of access. Admin can access all screens and change all settings. The user can access only the operational screens and has no access to the settings.

### Network

The network addresses could be set manually (static IP) or automatically via the DHCP server. To set static IP, MASK, GATEWAY and DNS addresses, the DHCP should be disabled. In order for the built-in DHCP client to be activated, the function should be enabled. As a result, all network addresses will become read-only. When the DHCP client is activated, all assigned values will be shown in the relevant fields of the [“Status Screen”](#). If due to any reason, the DHCP procedure cannot be completed, DB4402 will use AutoIP and will generate an IP Address.

### Audio

Specify Port for audio Streaming, Name of the stream (which is used also for email sender name and web title) and Quality (64, 96, 128, 192 or 256 kbps). The Audio Stream could be heard using suitable audio player (MS Media Player or Winamp) or through a WEB interface by pressing the “Listen” button.

### GSM Modem

Up to four numbers for SMS alarm notifications could be set. Baud Rate is mandatory for the proper operation of the GSM Modem.

We recommend a test SMS to be generated (via pressing the ‘Test’ button), once all needed settings are applied. Upon success, the SMS will be delivered to all specified GSM numbers.

Example of Test SMS Message:

DB4402 Test Message

**NOTE:** The current condition of the GSM Modem could be checked in the [“Status Screen”](#).

### SNMP

Specify Agent ID, Agent Port, Read/Write Communities, Manager IP and Manager Port.

Agent - enables/disables SNMP Agent.


**NOTE:** Agent ID is used for identification of the device among others when an SNMP notification is sent.

Once all needed settings are applied, use Test button to generate a test notification, which upon success will be received by the SNMP Manager.

Press the ‘Download’ button to download the latest available DB4402 SNMP MIB file.

**NOTE:** The MIB file may vary from one firmware revision to another. Downloading this file from the device guarantees that you have the proper MIB file.

## Presets

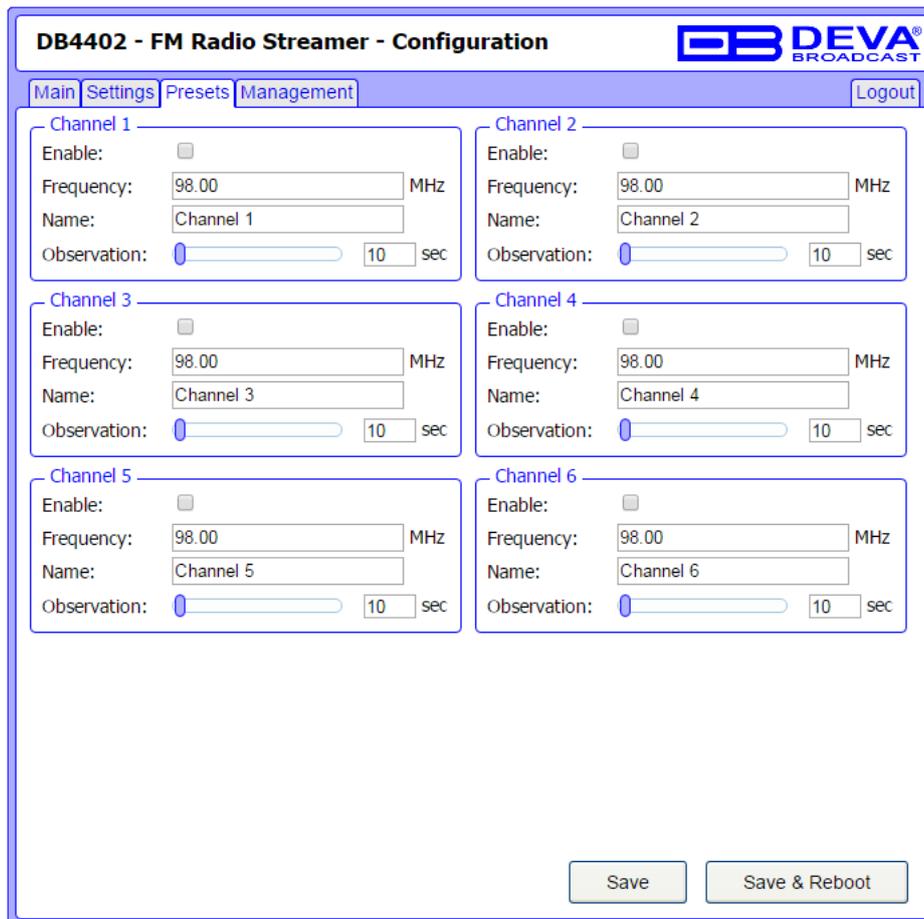

The screenshot displays the 'DB4402 - FM Radio Streamer - Configuration' web interface, specifically the 'Presets' tab. The interface is organized into a grid of six channel configuration panels, labeled Channel 1 through Channel 6. Each panel contains the following fields: an 'Enable' checkbox (all are currently unchecked), a 'Frequency' input field set to '98.00' MHz, a 'Name' input field (e.g., 'Channel 1'), and an 'Observation' slider set to '10' seconds. At the bottom of the configuration area, there are two buttons: 'Save' and 'Save & Reboot'. The top navigation bar includes 'Main', 'Settings', 'Presets', and 'Management', along with a 'Logout' button.


Presets tab allows the frequency presets and audio stream to be configured. The FM streamer works on a rotation principle. Each of the enabled and set channels will be included in an uninterrupted audio stream that could be heard using suitable audio player (Media Player, Winamp, etc.) or through the WEB interface by pressing the [Listen] button. The Audio Stream Server is configured in **Settings > Audio**, [“Main Settings Screen” on page 49](#).

**NOTE** that in order for a frequency to be included in the audio stream, the channel must be enabled. If frequency, name and observation time are set, but the channel is not enabled, it will not be included in the audio stream, but will appear in the Channel Preset Buttons, hence allowing the frequency to be heard upon manually pressing the relevant button.

Each of the 6 channels includes the following settings:

- Enable – includes the frequency in the constantly playing/rotating audio stream;
- Frequency – specifying the frequency to be monitored/streamed;
- Name – specifies the name of the channel;
- Observation – sets the time duration - how long will the audio from this channel will be heard in the audio stream.

## MANAGEMENT SCREEN

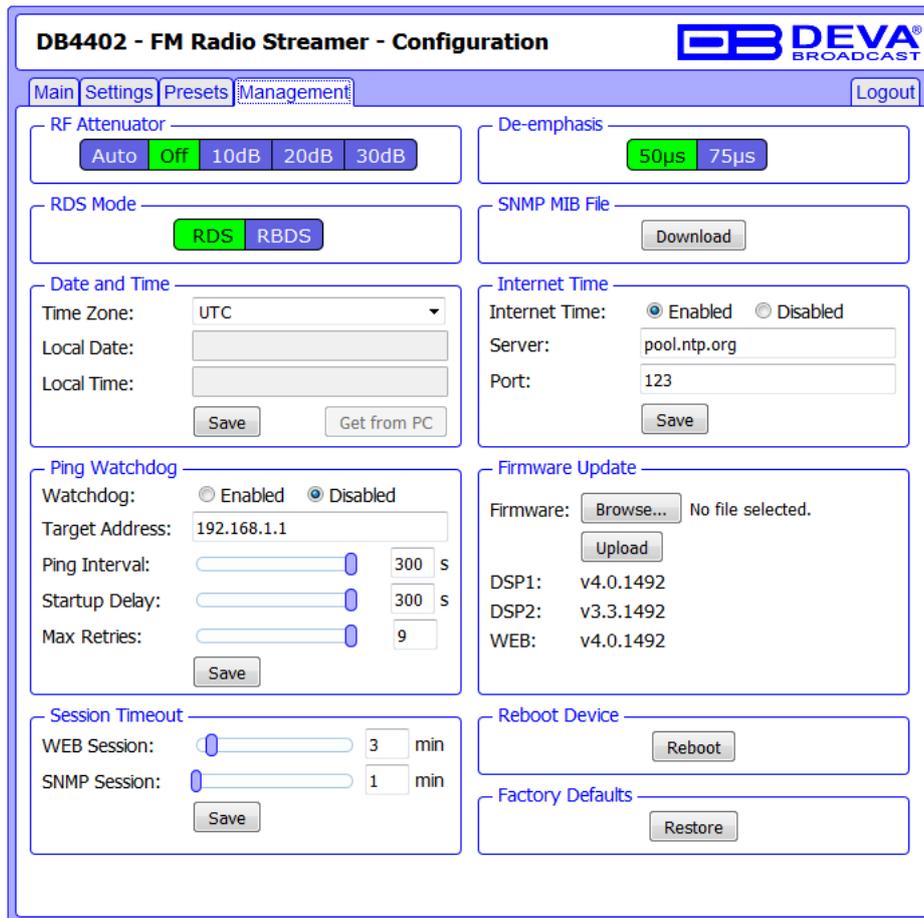

### RF Attenuator

Indicates the Antenna Input Attenuator's setting. Attenuation level can be selected by pressing on the preferred value. When AUTO is selected, DB4402 will adjust automatically the Attenuator's position.

### De-emphasis

Indicates currently selected de-emphasis.

### Date and Time / Internet Time

When Internet Time is enabled, DB4402 will automatically adjust its internal clock through the Internet. When Internet Time is disabled, Date and Time should be entered manually into corresponding fields or filled from PC Clock by pressing the 'Get From PC' button.

### Ping Watchdog

The idea of this feature is a connection to DB4402 over the Internet to be established if the device is connected behind a mobile router. If there is no connection with the Internet, some mobile routers disconnect their radios and the DB4402 will become inaccessible. The Ping Watchdog will make enough traffic for the router to stay connected to the network. Reboot is needed because there are some routers that nevertheless the ping, will disconnect. Reconnection will be made only if there is a disconnect and connect at the LAN port.

The Ping Watchdog will ping the specified IP address for connection status. If the remote IP address does not respond to Ping for the specified number of times (Max Retries), the DB4402 will power reboot. Please note that the 'Ping Watchdog' is disabled by default.

### Firmware Update

If needed, DB4402's firmware could be updated. Updating the firmware will ensure:

- New function(s);
- Improved performance;
- Eliminated bugs (if any).

To update the device firmware, please follow the steps listed below:

- Press the 'Browse'/'Choose File' button and select the new firmware file;
- Press the "Upload" button;
- Wait for the process to complete.

**NOTE:** Checking for updates regularly will ensure that the device is functioning correctly, and avoid potential problems.

### Reboot Device

Pressing Reboot button will initiate a 'hardware reset' as if you have switched off and on the device. The previously applied/saved settings will not be deleted.

### Factory Defaults

DB4402 could be restored to Factory Defaults from its non-volatile memory. The procedure is quite simple - Press the 'Restore Button' and confirm the procedure.

**WARNING:** Before returning DB4402 to its factory defaults, all remote users should be informed that they may cease to communicate with the device.

### Session Timeout

Set WEB and SNMP sessions timeout. **PLEASE NOTE** that during session, the Logger mode is not active, thus no Alarms are generated.

### SNMP MIB File

Press the 'Download' button to download the latest available DB4402 SNMP MIB file.

**NOTE:** The MIB file may vary from one firmware revision to another. Downloading this file from the device guarantees that you have the proper MIB file.

## External GSM Modem Settings

To fulfill the Remote Monitoring Functions via GSM it is necessarily to connect an external GSM modem to DB4402. To do this, connect the GSM Modem to the rear panel DB-15 male connector through the cable provided together with GSM Modem. A GSM Antenna must be supplied and connected to the connector of the GSM Modem.

**IMPORTANT:** Position the GSM Antenna as far as possible from the DB4402's FM Antenna.

**WARNING:** Please check SIM Card PIN request to be disabled. Otherwise DB4402 can not operate the modem.

The GSM Modem must be configured with the following settings:

Baud rate: equal to DB4402 setting (see [“Main Settings Screen” on page 49](#))

Data bits: 8

Stop bit: 1

Parity: None

Hardware Flow Control: None

**NOTE:** The GSM Modems provided by DEVA Broadcast Ltd. are pre-configured. In case of using different modems, please comply with the settings above.

To ensure proper installation of the GSM Modem, please observe the following sequence:

1. Install and connect the GSM Antenna according to the above recommendations.
2. Insert the SIM card into the holder. Card must be with deactivated PIN request.
3. Connect the GSM Modem and DB4402 with the communication cable.
4. Power-up the GSM Modem.
5. Power-up DB4402.

If the installation is proper, the GSM Modem will immediately startup. This will be noticed by the fast blinking of the 'GSM' Led on the DB4402's front panel. The status of the GSM Modem will also be exposed on [“Status Screen”](#). Few seconds are usually necessary for the GSM Modem to initialize and to register into the GSM Network. When the GSM Modem is Ready the 'GSM' Led will start blinking slowly. The GSM Operator's Logo and the Field Strength will be also shown on the [“Status Screen”](#).

It is important to notice the call duration, which is 1 minute, otherwise the GSM connection may turn overused. 'Call Duration' defines the maximum outgoing call duration, which will be hanged-up by DB4402 when it reaches the defined value (1 minute).

Only authorized GSM numbers can request remote notifications and remote listening. To register up to four GSM numbers use Main Settings Screen.

It is important to enter the GSM numbers properly, using the correct prefix for the country. For example: +359898123456

**NOTE:** The GSM Modem may be connected to DB4402 without shutting down the device - so called 'Hot Plug'. When disconnected or powered down, the GSM Modem can be reconnected after the 'GSM' Led stops blinking (about 5 seconds). To prevent possible problems, we recommend, when possible, not to use 'Hot Plug'.

‘Status Request’ Command Format:

Status FFF.FF

‘Remote Audio Listening’ Command Format:

Listen FFF.FF

Where FFF.FF is the frequency to Tune in the range of 87 to 108 MHz.

For example: “Status 102.55” or “Listen 88.80”.

**IMPORTANT:** Do not include leading zeroes such as “Listen 089.90”. Fill in with trailing zeroes up to two digits after the decimal symbol. Decimal symbol must be “.” (dot)

If DB4402 receives an authorized ‘Status Request’ command, after a short interval (about 5 seconds), in which DB4402 has to retune and collect summarized data, the Caller will receive a SMS response. For Example:


```
STATUS :  
27.09.2011 09:08:34  
FREQ:102.50MHz  
RF:32.7dBuV  
MPX:103.2kHz  
Left:-4.8dB  
Right:-4.9dB  
Pilot:7.5kHz  
RDS:18.5kHz
```

‘Remote Audio Listening’ command will generate (only if the calling number is authorized) a response call from DB4402 to the command sender. DB4402 will wait for answer, and will hang-up after 30 seconds, if there is no incoming answer. When a call is accepted, the duration of ‘listening’ is determinate by ‘Call Duration’ interval or until the call is ended.


## Network Discovery

Network discovery is a network setting that defines whether your computer can see (find) other computers and devices on the network and whether other computers on the network can see your computer. By default, Windows Firewall blocks network discovery but you can enable it.

1. Open Advanced sharing settings by clicking the Start button, and then click on “Control Panel”. In the search box, type “network”, click “Network and Sharing Center”, and then, in the left pane click “Change advanced sharing settings”.
2. Select your current network profile.
3. Click “**Turn on network discovery**”, and then click “Save changes”. If you’re prompted for an administrator password or confirmation, type the password or provide confirmation.

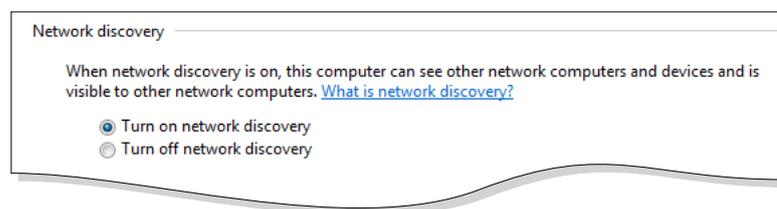

4. To access the device, open a new Explorer bar and click on **Network (1)**. If you have successfully enabled the network discovery option, the device will be displayed. Double click on **DB4402 - FM Monitoring Tool (2)** or **DB4402 - FM Radio Streamer** will open a new WEB browser window requiring a username and a password.

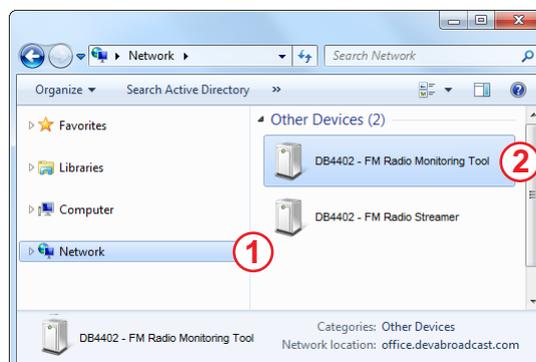

**NOTE:** If you have already enabled this function on your computer just open a new Explorer bar and click on **Network (1)**. The device will be displayed.

## WARRANTY TERMS AND CONDITIONS

**I. TERMS OF SALE:** DEVA Broadcast Ltd. products are sold with an understanding of “full satisfaction”; that is, full credit or refund will be issued for products sold as new if returned to the point of purchase within 30 days following their receipt, provided that they are returned complete and in an “as received” condition.

**II. CONDITIONS OF WARRANTY:** The following terms apply unless amended in writing by DEVA Broadcast Ltd.

**A.** The Warranty Registration Card supplied with this product must be completed and returned to DEVA Broadcast Ltd. within 10 days of delivery.

**B.** This Warranty applies only to products sold “as new.” It is extended only to the original end-user and may not be transferred or assigned without prior written approval by DEVA Broadcast Ltd.

**C.** This Warranty does not apply to damage caused by improper mains settings and/or power supply.

**D.** This Warranty does not apply to damage caused by misuse, abuse, accident or neglect. This Warranty is voided by unauthorized attempts at repair or modification, or if the serial identification label has been removed or altered.

**III. TERMS OF WARRANTY:** DEVA Broadcast Ltd. products are warranted to be free from defects in materials and workmanship.

**A.** Any discrepancies noted within TWO YEARS of the date of delivery will be repaired free of charge, or the equipment will be replaced with a new or remanufactured product at DEVA Broadcast Ltd. option.

**B.** Parts and labor for factory repair required after the two-year Warranty period will be billed at prevailing prices and rates.

### **IV. RETURNING GOODS FOR FACTORY REPAIR:**

**A.** Equipment will not be accepted for Warranty or other repair without a Return Authorization (RA) number issued by DEVA Broadcast Ltd. prior to its return. An RA number may be obtained by calling the factory. The number should be prominently marked on the outside of the shipping carton.

**B.** Equipment must be shipped prepaid to DEVA Broadcast Ltd.. Shipping charges will be reimbursed for valid Warranty claims. Damage sustained as a result of improper packing for return to the factory is not covered under terms of the Warranty and may occasion additional charges.

## PRODUCT REGISTRATION CARD

- All fields are required, or warranty registration is invalid and void

Your Company Name \_\_\_\_\_

Contact \_\_\_\_\_

Address Line 1 \_\_\_\_\_

Address Line 2 \_\_\_\_\_

City \_\_\_\_\_

State/Province \_\_\_\_\_ ZIP/Postal Code \_\_\_\_\_

Country \_\_\_\_\_

E-mail \_\_\_\_\_ Phone \_\_\_\_\_ Fax \_\_\_\_\_

Which DEVA Broadcast Ltd. product did you purchase? \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_

Product Serial # \_\_\_\_\_

Purchase date \_\_\_\_ / \_\_\_\_ / \_\_\_\_

Installation date \_\_\_\_ / \_\_\_\_ / \_\_\_\_

\_\_\_\_\_  
Your signature\*

\*Signing this warranty registration form you are stating that all the information provided to DEVA Broadcast Ltd. are truth and correct. DEVA Broadcast Ltd. declines any responsibility for the provided information that could result in an immediate loss of warranty for the above specified product(s).

**Privacy statement: DEVA Broadcast Ltd. will not share the personal information you provide on this card with any other parties.**